




NICHOLSON™

**WOOD PROCESSING
EQUIPMENT**


A6

SLIDING RING DEBARKER

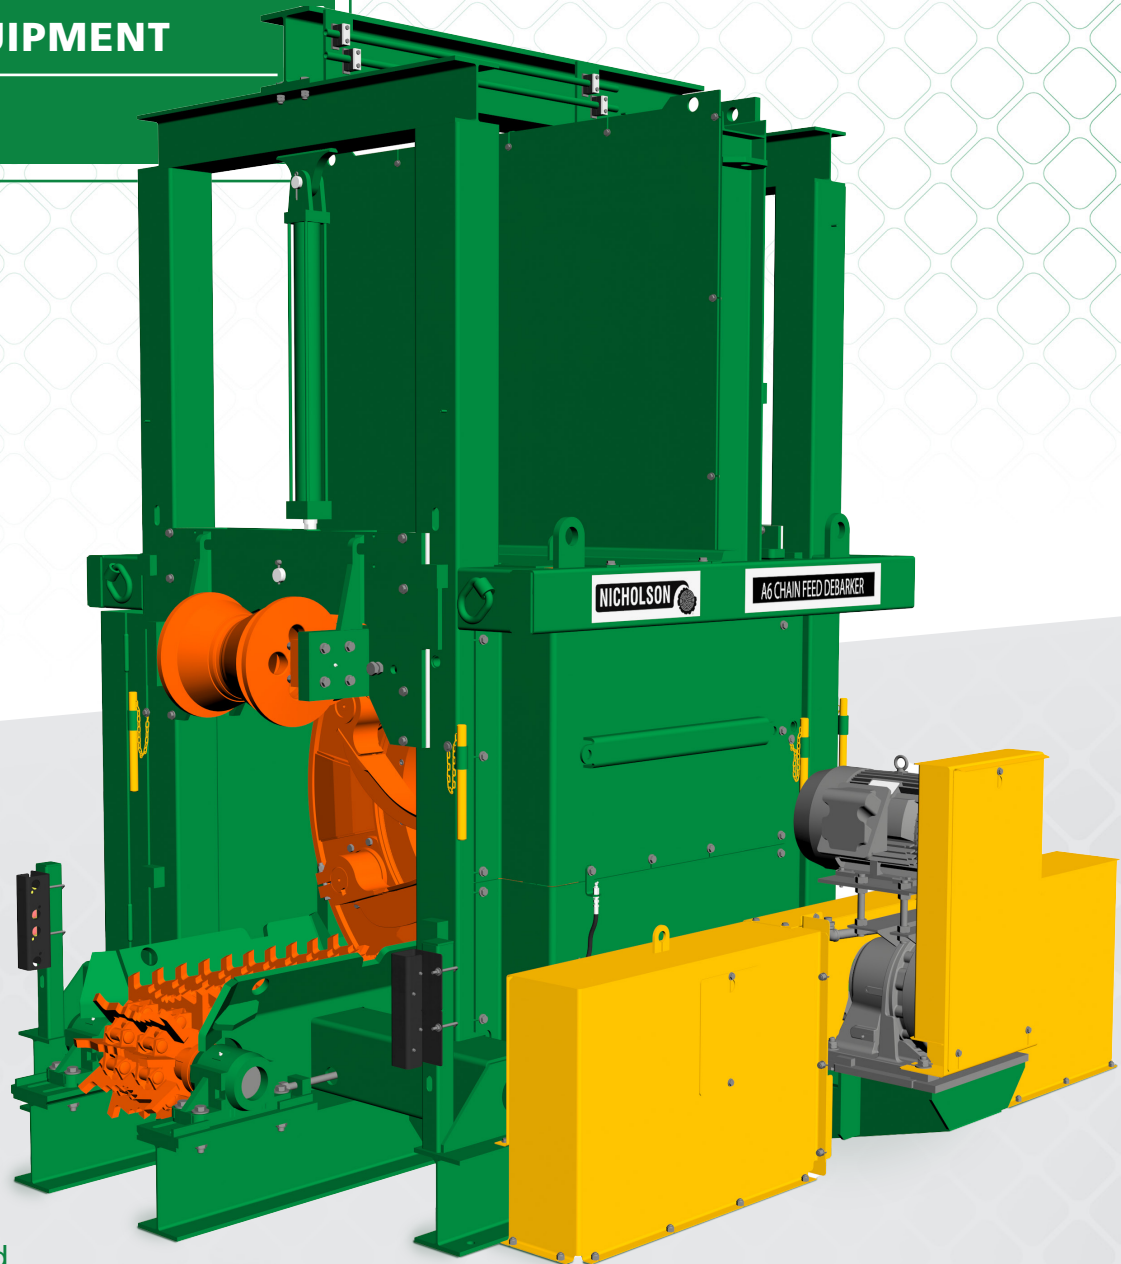

The Nicholson A6 is widely considered the industry standard for hardwood and softwood applications requiring low to medium debarking speeds.

The A6 is offered in a range of sizes and configurations. Nicholson's sales team has the experience to guide you through choosing the best options for your specific application.

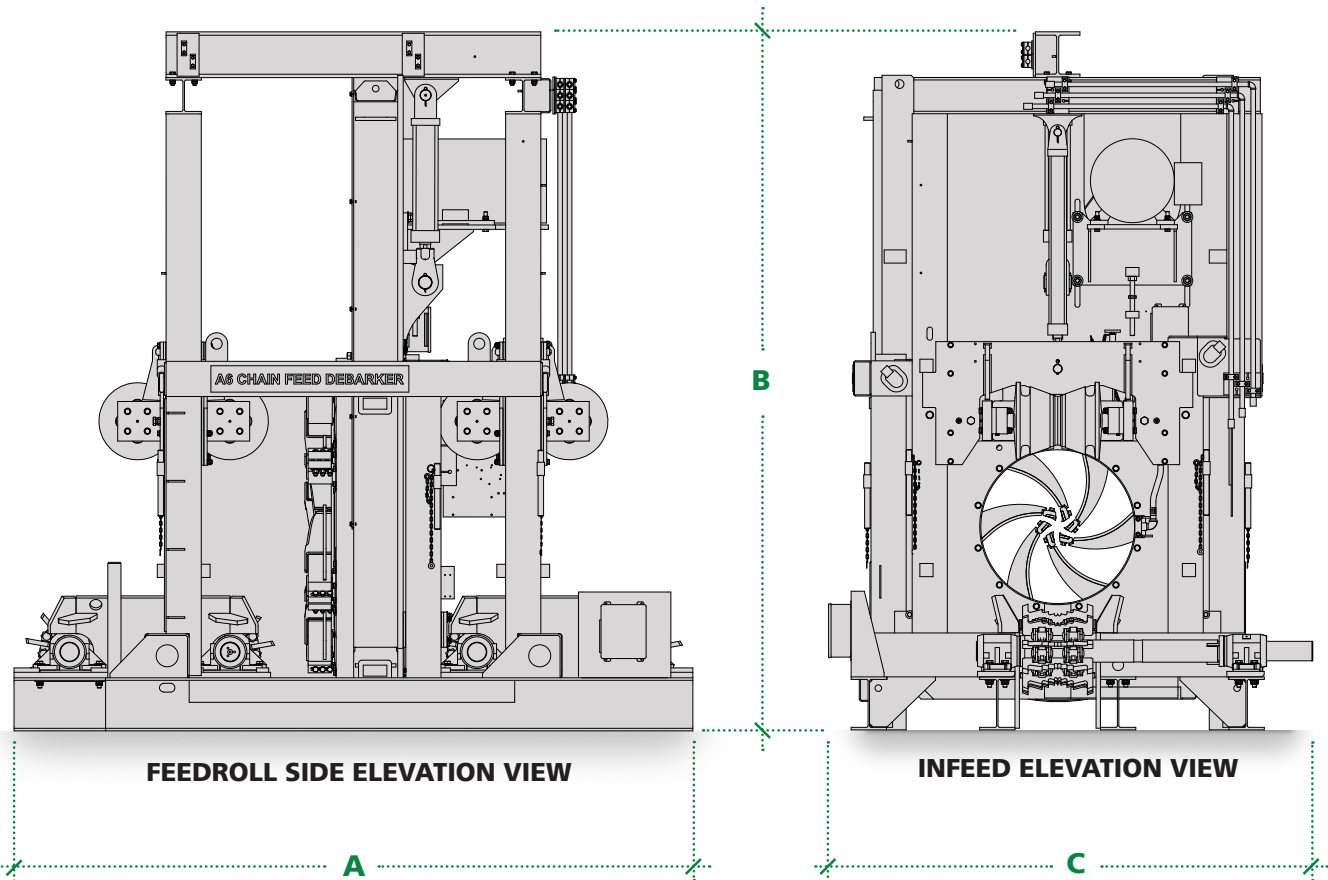

TECHNICAL DATA	Units	22"	27"	35"	44"	
A	in (mm)	154 (3,912)	154 (3,912)	154 (3,912)	154 (3,912)	
B	in (mm)	159 (4,039)	159 (4,039)	159 (4,039)	186 (4,724)	
C	in (mm)	94 (2,388)	94 (2,388)	94 (2,388)	114 (2,896)	
Log diameter	in (mm)	3.5-20 (89-508)	3.5-25(89-635)	4.0-33 (102-838)	4.5-42 (114-1,067)	
Min. log length	in (m)	77 (1.96)	77 (1.96)	77 (1.96)	77 (1.96)	
Debarker weight	lbs (kg)	27,000 (12,273)	29,000 (13,182)	31,000 (14,091)	45,000 (20,455)	
Max. feed speed*	fpm (mpm)	175 (53)	155 (47)	150 (46)	120 (37)	

*Feed speed for optimal conditions. Consult with your Nicholson distributor for application specific feed speeds.
 As all Nicholson product is subject to a continuous improvement program, specifications may change without prior notice.

NORTH AMERICA
+1-844-227-5633
forestsales@nicholsonmfg.com
+1-250-656-3111



NICHOLSON MANUFACTURING LTD.
 9896 Galaran Road
 Sidney, BC, Canada V8L 4K4

NICHOLSON™
www.debarking.com

A6 Ring Debarker-1000 (CA EN) 01/2023
 © 2023 Nicholson Manufacturing Ltd.
 A Kadant Company

