



Save

| ROLL ORDER SPECIFICATIONS | | STANDARD UNWIND ROLL CHART | | |
|---|---|----------------------------|----------------------|--|
| INDICATE BY FIGURE NUMBER, UNWIND DIRECTION DESIRED, AND WHETHER SURFACE OR REVERSE PRINTING. | | | | |
| 1 | | 2 | | |
| 3 | | 4 | | |
| 5 | | 6 | | |
| 7 | | 8 | | |
| UNWIND SPECIFIED | SURFACE | | AUTHORIZED SIGNATURE | |
| | REVERSE (READING THROUGH FILM) | | | |
| ELECTRONIC EYE SPOT SHOULD BE LOCATED ON | | | | LEADING EDGE OF ELECTRONIC EYE SPOT SHALL BE FROM LEADING EDGE OF THE PRINTING COPY (HEAD OF ARROW ON DIAGRAM INDICATES LEADING EDGE) |
| LEFT EDGE OF THE ROLL (INDICATED BY LETTER "L" ON ROLL DIAGRAM) | RIGHT EDGE OF THE ROLL (INDICATED BY LETTER "R" ON ROLL DIAGRAM) | | | |

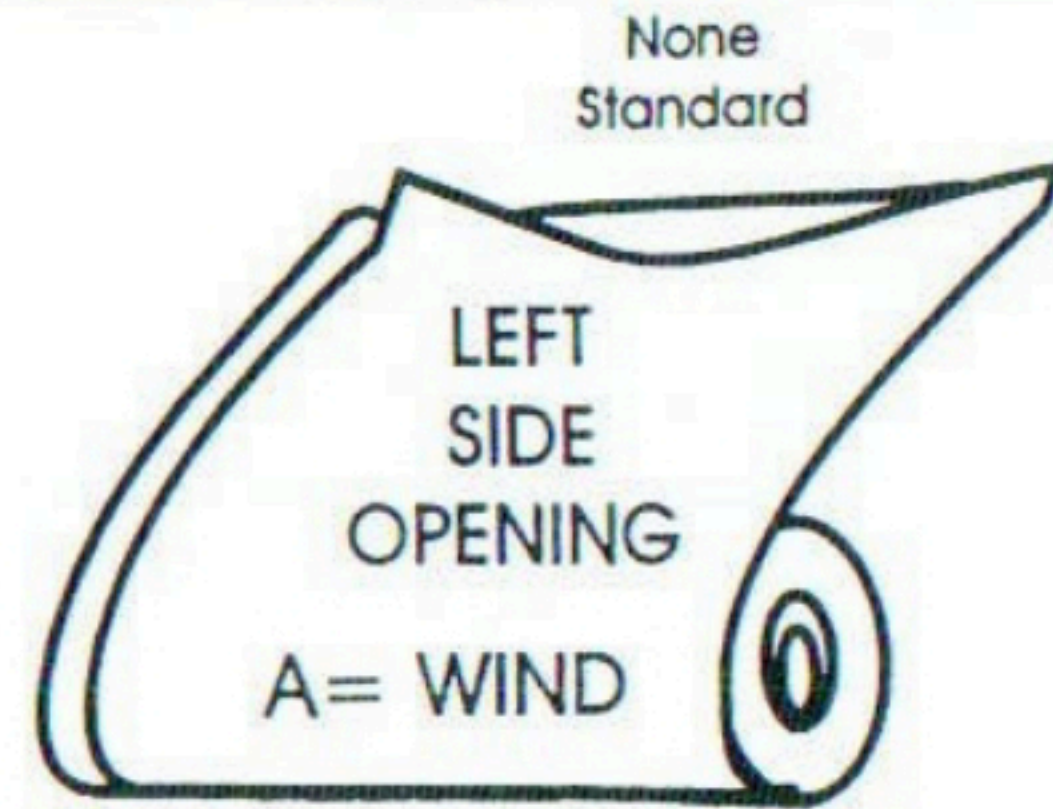

A=W. Short fold wound outside roll

- J=Fold
- C . F .

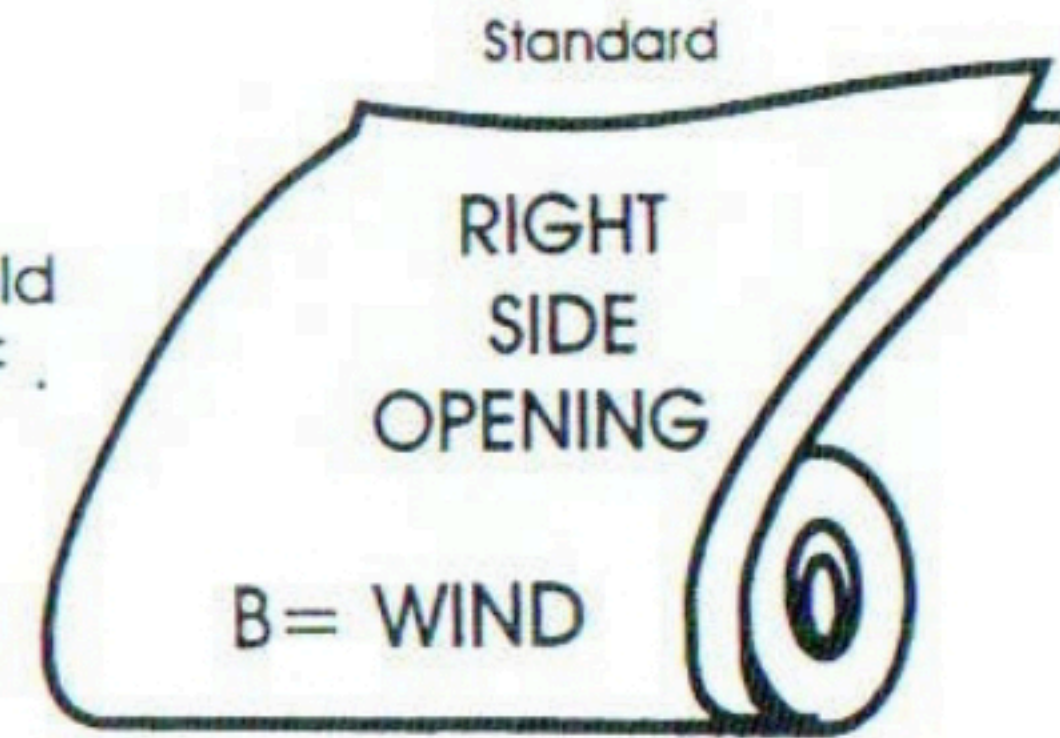

B=W. Long fold wound outside roll.

