



DUBLEAZA EFICIENTA IZOLATIEI TERMICE

SILVER

BARIERA TERMICA & BARIERA DE VAPORI

Latime totala rola
1,6m

Lungime
25m

Latime utila
1,5m

Suprafata rola
40m²



COMPOZITIE:



Folie aluminiu + Folie cu bule de aer + Folie aluminiu



GROSIME TOTALA:
4 mm (±5%)



FATA 1:

Aluminiu 12 MY, puritate 99.9%



FATA 2:

Aluminiu 12 MY, puritate 99.9%




DENSITATE TOTALA:
205 g/m²



REFLECTIVITATE (RANDAMENT):
95-97%



COEFICIENT DE TRANSFER TERMIC:
0.024 W/m²K

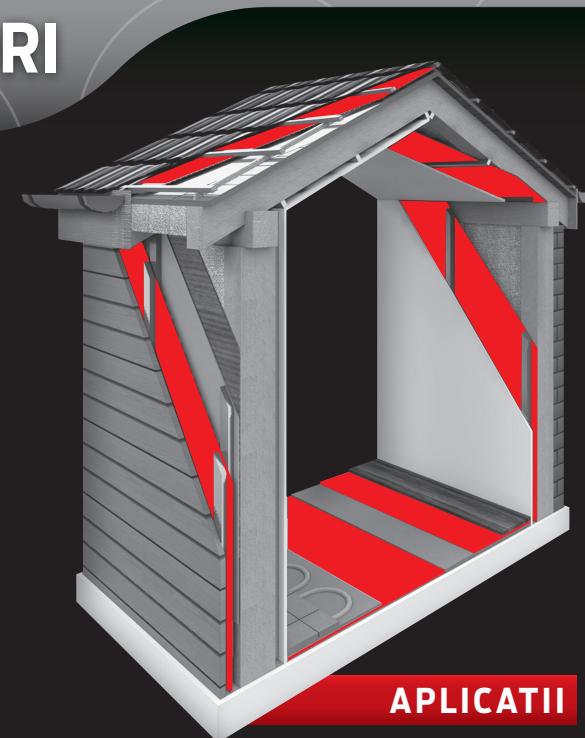

APLICATII

ISOFLECT SILVER

- esential in cadrul tuturor solutiilor de izolare termica
- asigura stabilitatea sistemului pe toata perioada utilizarii
- fabricat din materiale de calitate premium
- inlocuieste bariera clasica de vapori
- elimina riscul formarii condensului in straturile de vata minerala
- creste cu 30% randamentul incalzirii in pardoseala
- montaj simplu si rapid

PANA LA 50 DE ANI GARANTIE*
* conform fiselor de montaj