


Technical Parameters (T=25 Degrees Celsius)

Item	Parameter
Input Voltage	110-240V, 50-60 Hz
Power Consumption	35W +/- 10%
Power Factor	>0.9
Colour Temperature	2700-3800K, 4000-5000K, 5000-6500K
Maximum Candela Angle	150 Degrees
Ra Colour Index	>80
Luminous Flux	1890LM
Operating Temperature	-20 Degrees C to +55 Degrees C
Storage Temperature	-20 Degrees C to +60 Degrees C
Size	1296 x 296 x 26 mm
Net Weight	5.75 +/- 0.2 kG
Fixing Options	Surface, insert or hanging installation

Optical Parameters


a. Light Distribution Graph

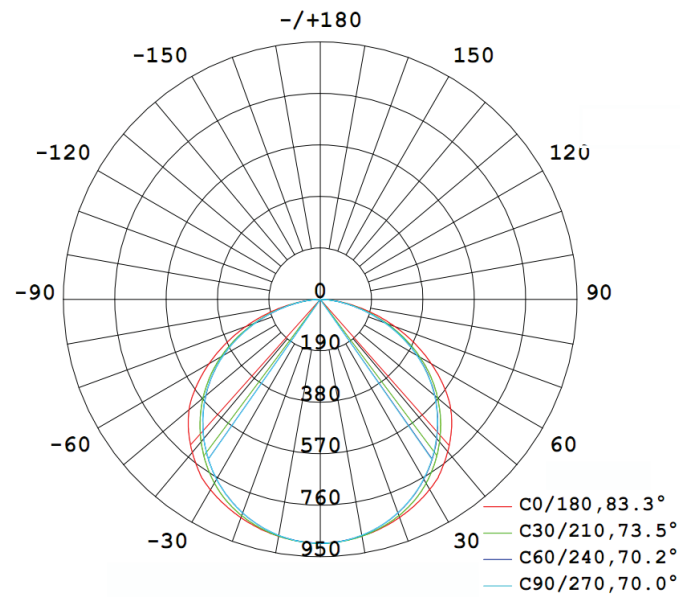

b.Illumination Intensity Chart


CCT:5000-6500K

Distance Illuminated area Illuminance 2700-3800K 4000-5000K 5000-6500K

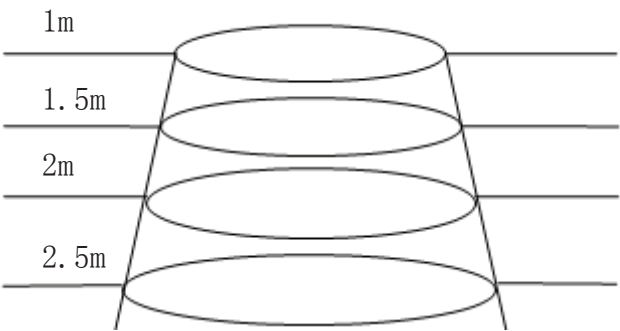

552lx	621lx	699lx
257lx	290lx	326lx
147lx	166lx	187lx
95lx	107lx	120lx

Dimensions:

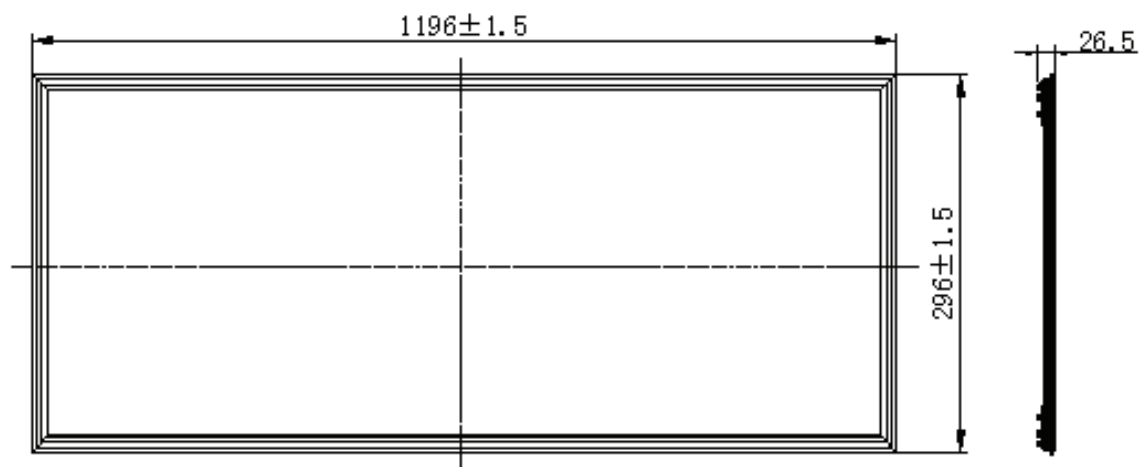

※ All dimension units are millimeters.