





Your Innovative Packaging Solutions Partner

Technical Data Sheet

L310 - Lid, 86 mm Snap On

PRODUCT DIMENSIONS (mm)

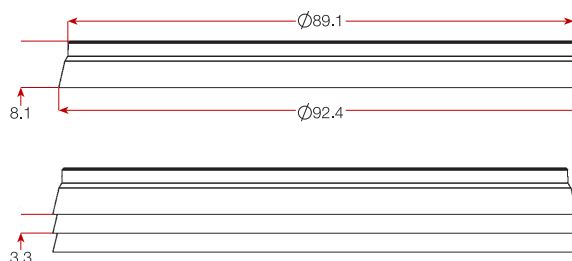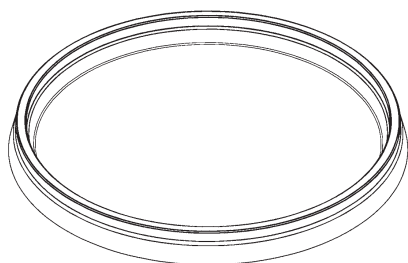

SHAPE Round

CLOSURE TYPE Plug-fit

SEAL INTEGRITY Medium Integrity

WEIGHT (typical values) 5.8 g

PACKING	No. per carton	2200		
	Carton size	517 mm L x 385 mm W x 395 mm H (0.079 m ³)		
	Carton weight when full	12.0 kg +/- kg		
	Carton liner	Polypropylene (blue)		
	Stack sleeve	Polypropylene.		
	Pallet Specifications	Export	South Island	North Island
	Cartons per pallet	24	30	18
	Quantity per pallet	52,800	66,000	39,600
	Pallet dimensions	1000 mm x 1200 mm	1100 mm x 1200 mm	1100 mm x 1200 mm
	Height including pallet	2.13 m	2.13 m	1.34 m
	Cubic metres (incl. pallet)	2.55 m ³	2.81 m ³	1.76 m ³

RAW MATERIAL  PP (Polypropylene)
All of Tecpak's products are made from plastic polymers in grades that are suitable for food packaging and comply with US regulations FDA Title21, CFR Part 177 1520 for Olefin Polymers and/or EU Directive 2002/72/EEL.

ENVIRONMENTAL The material used in this product is recyclable. Local authorities should be contacted for information on curbside collection.

COLOURS Natural, Clear, White. Other colours available on request.

DECORATION OPTIONS Dry offset printing (*see separate printing specifications for this product*).
In Mould Labelling (*see separate IML specifications for this product*).

QUALITY Tecpak Industries Limited is certified to ISO9001:2000.

FOOD SAFETY Tecpak Industries Limited is certified to ISO22000:2005 Food Safety Management Systems.

PERFORMANCE

Hot Filling
The maximum fill temperature is 50° C. Internal process trials should be undertaken to determine the viability of this product for the intended use.

Freezing
The standard resin used for natural, white and coloured products will resist temperatures down to -20°C. Deep freezing below this temperature may require a special resin available on request. The standard resin used for clear products may become brittle at temperatures below 0° C. Internal process trials should be undertaken to determine the viability of this product for the intended use.

Re-heating
This product may be microwaved. Internal process trials should be undertaken to determine the viability of this product for the intended use.

Shelf Life
The compliance of the product to the technical specifications in this data sheet is guaranteed for 12 months after the date of delivery subject to suitable storage.

Stacking (empty). Ideally pallets should be stacked no more than two high.

Stacking (full). It is recommended that this product be packed into self supporting trays or cardboard boxes. Internal process trials should be undertaken to determine the viability of free-standing stacking and transportation.

Other
Resins used are dishwasher safe and are designed for re-usability.

In all cases internal trials should be undertaken to determine the suitability of the packaging through all stages of the process.