

DYNATECH PUMPS

6" DT 13


6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

Performance/ Performances/ Prestaciones

- Maximum sand quantity in the water/ Max quantite de sable dans l'eau/
Maxima cantidad de arena en el agua - 200 g/m3
- Water temperature up to/ Temperature de l'eau jusqu' a/ Temperature del agua hasta - 50 degree Celcius
 - Connection/ Connexion/ Acoplamiento - NEMA Standards
- Impeller/ Roues/ Rodete - mixed flow/ helicocentrifuges/ semi axiales
- Installation/ Instalacion - horizontal and vertical/ horizontale and verticale

Type Tipo	N.Stages/ N.Etage/ N.Etapas	Motor/ Moteur			Pump/ Pompes/ Bombas				Q m3/h l/min	Delivery/ Debit/ Caudal					
		Type Tipo	KW	HP	A (mm)	DN (RPT or NPT)	B (mm)	Kg		0	5	10	13	15	20
										0	83.3	166.6	216.7	250	333
DT 13-6	6	4"	3.00	4.00	606	2.5"	136	17.0	Head/ Hauteurman/ Alturaman H m	66.8	65.0	58.1	52.0	47.4	32.9
DT 13-8	8	4"	4.00	5.50	726	2.5"	136	21.0		87.6	86.7	77.4	68.0	63.1	43.8
DT 13-10	10	4"/ 6"	5.50	7.50	846	2.5"	136	25.5		113.1	108.3	96.8	86.0	79.1	54.7
DT 13-11	11	4"/ 6"	5.50	7.50	906	2.5"	136	27.5		126.1	119.1	106.5	95.0	87.0	60.1
DT 13-12	12	4"/ 6"	5.50	7.50	966	2.5"	136	29.5		135.9	130.0	116.0	104.0	95.2	65.1
DT 13-14	14	6"	7.50	10.00	1092	2.5"	136	34.5		154.0	151.6	135.5	120.0	110.8	76.5
DT 13-15	15	6"	7.50	10.00	1152	2.5"	136	37.0		166.8	162.5	145.3	129.0	118.6	81.2
DT 13-16	16	6"	7.50	10.00	1212	2.5"	136	39.5		180.5	173.3	155.6	139.0	127.1	86.9
DT 13-18	18	6"	9.30	12.50	1332	2.5"	136	44.5		200.0	195.0	174.2	155.0	142.4	98.3
DT 13-19	19	6"	9.30	12.50	1392	2.5"	136	47.0		211.3	205.4	184.6	163.0	149.3	103.2
DT 13-21	21	6"	11.00	15.00	1512	2.5"	136	52.0		233.5	227.4	203.2	180.0	165.7	113.8
DT 13-23	23	6"	11.00	15.00	1632	2.5"	136	56.5		263.0	249.1	222.6	197.0	181.9	125.5
DT 13-24	24	6"	11.00	15.00	1692	2.5"	136	58.5		269.6	260.8	232.7	207.0	189.5	130.4
DT 13-26	26	6"	13.00	17.50	1812	2.5"	136	63.5		289.5	280.7	252.8	224.0	205.1	140.6
DT 13-27	27	6"	13.00	17.50	1872	2.5"	136	65.5		300.3	292.4	261.9	232.0	213.6	149.4
DT 13-30	30	6"	15.00	20.00	2052	2.5"	136	67.5		334.3	325.0	291.0	257.0	237.2	161.1
DT 13-31	31	6"	15.00	20.00	2112	2.5"	136	69.5		344.7	334.2	301.5	268.0	245.4	168.3
DT 13-33	33	6"	18.50	25.00	2232	2.5"	136	74.5		367.0	357.4	319.4	282.0	258.8	179.6
DT 13-35	35	6"	18.50	25.00	2352	2.5"	136	79.5		401.7	379.0	338.0	300.0	274.5	193.5
DT 13-38	38	6"	18.50	25.00	2532	2.5"	136	87.0		423.3	411.6	369.5	327.0	299.1	206.0
DT 13-41	41	6"	22.00	30.00	2712	2.5"	136	94.5		456.0	444.0	396.8	350.0	322.1	225.7
DT 13-44	44	6"	22.00	30.00	2892	2.5"	136	102.0		488.5	476.5	428.3	378.0	348.5	238.7

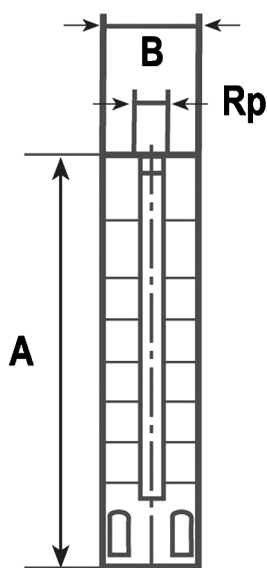


DYNATECH PUMPS

6" DT 13

6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

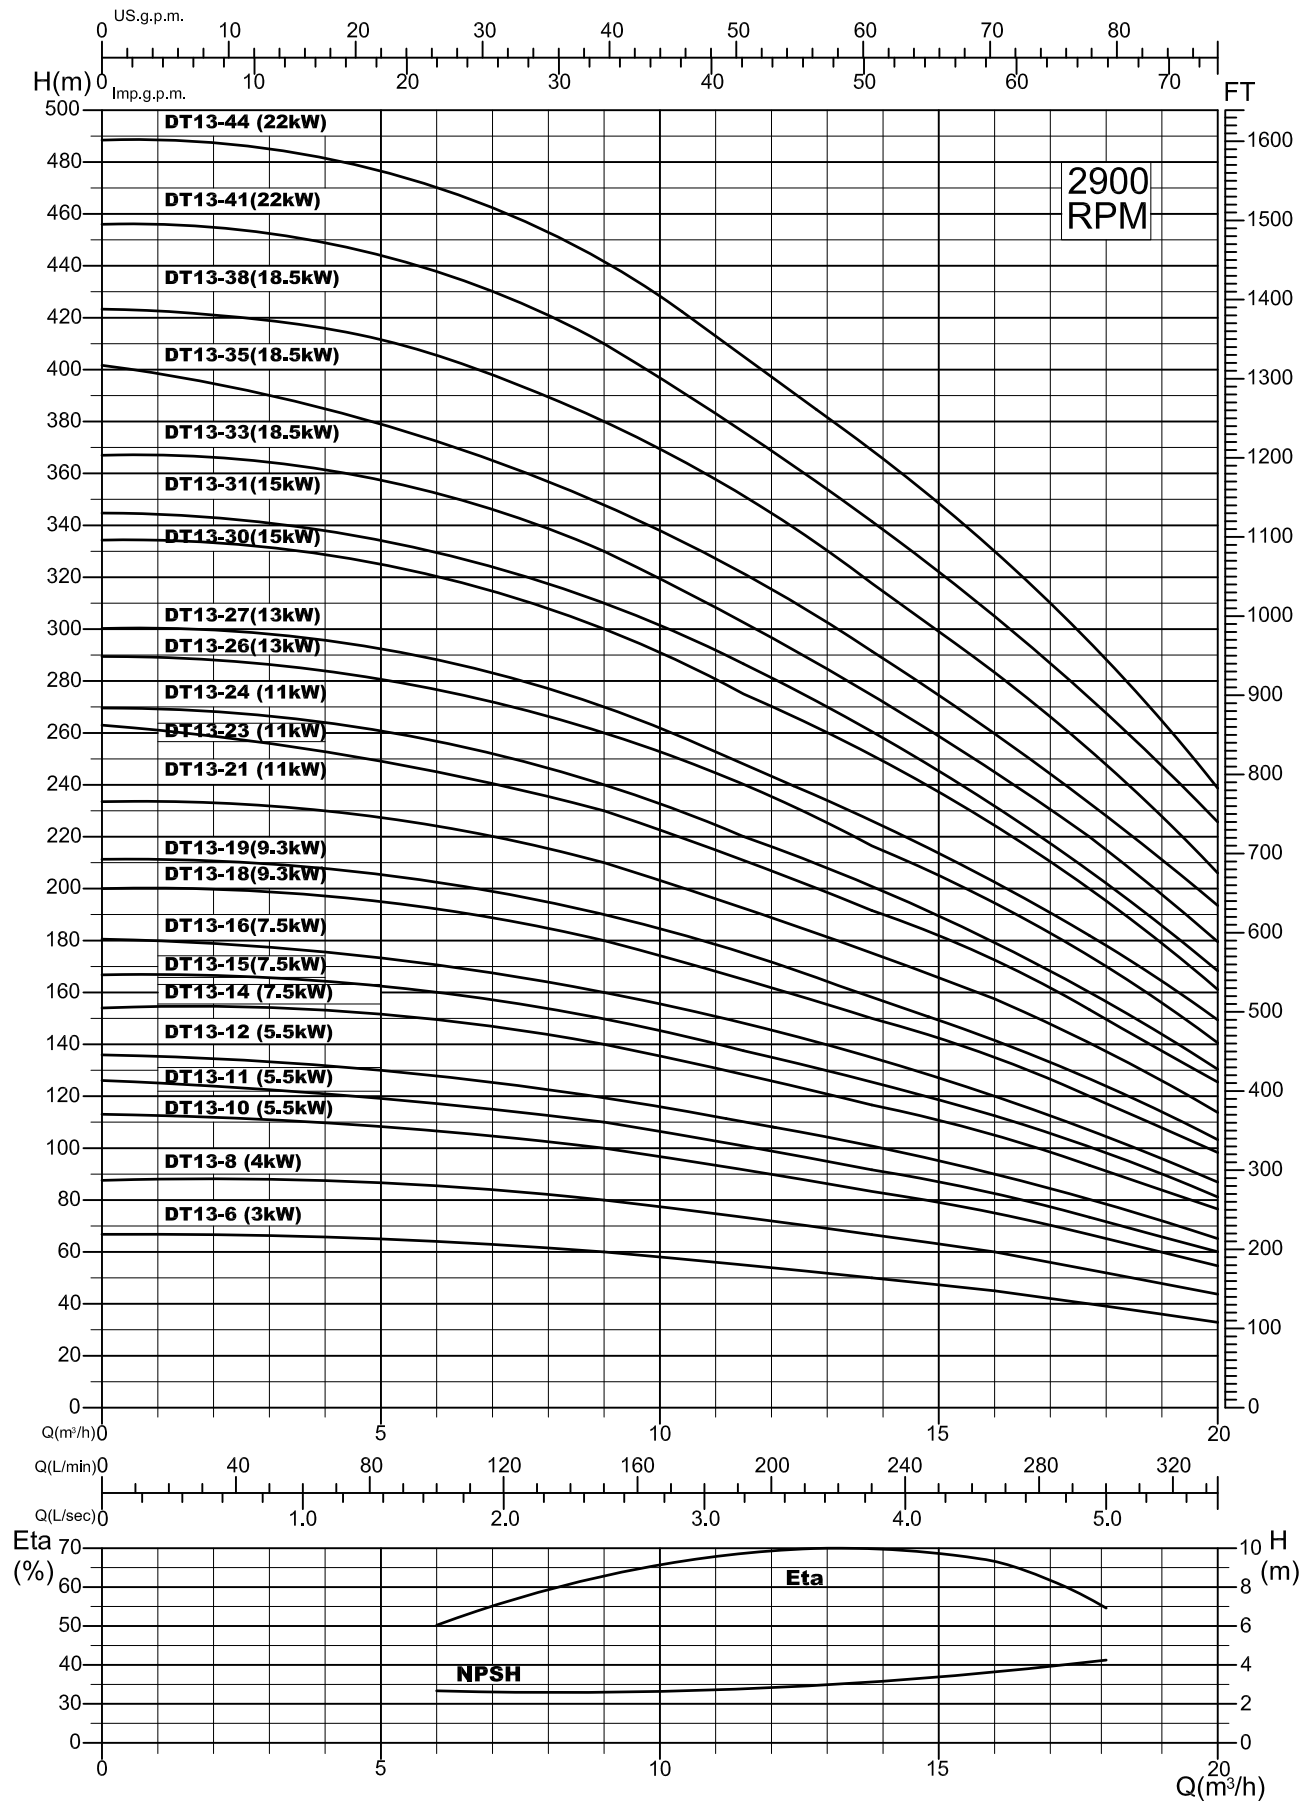

DYNATECH PUMPS

6" DT 14


6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

Performance/ Performances/ Prestaciones

- Maximum sand quantity in the water/ Max quantite de sable dans l'eau/
Maxima cantidad de arena en el agua - 200 g/m³
- Water temperature up to/ Temperature de l'eau jusqu' a/ Temperature del agua hasta - 50 degree Celcius
 - Connection/ Connexion/ Acoplamiento - NEMA Standards
 - Impeller/ Roues/ Rodete - mixed flow/ helicocentrifuges/ semi axiales
- Installation/ Instalacion - horizontal and vertical/ horizontale and verticale

Type Tipo	N.Stages/ N.Etage/ N.Etapas	Motor/ Moteur			Pump/ Pompes/ Bombas				Q	Delivery/ Debit/ Caudal					
		Type Tipo	KW	HP	A (mm)	DN (RPT or NPT)	B (mm)	Kg		m3/h	0	5	10	15	20
									l/min	0	83.3	166.6	250	333	416.6
DT 14-6	6	4"	3.00	4.00	606	2.5"	136	16.0	Head/ Hauteurman/ Alturaman H m	52.0	50.4	47.4	42.7	32.8	8.8
DT 14-9	9	4"	4.00	5.50	786	2.5"	136	22.0		80.0	76.0	69.9	62.3	47.7	17.3
DT 14-12	12	4"/ 6"	5.50	7.50	972	2.5"	136	29.0		104.0	98.5	92.3	83.0	65.0	24.0
DT 14-17	17	6"	7.50	10.00	1272	2.5"	136	38.5		136.0	133.1	127.0	112.1	84.9	37.7
DT 14-21	21	6"	9.30	12.50	1512	2.5"	136	46.5		168.0	164.5	157.2	138.0	105.0	50.1
DT 14-25	25	6"	11.00	15.00	1752	2.5"	136	54.0		204.0	198.5	186.3	166.0	127.0	60.9
DT 14-29	29	6"	13.00	17.50	1992	2.5"	136	62.0		240.0	234.7	222.8	198.9	152.7	83.8
DT 14-34	34	6"	15.00	20.00	2292	2.5"	136	71.5		279.4	274.1	259.7	232.9	178.0	101.2
DT 14-42	42	6"	18.50	25.00	2772	2.5"	136	87.0		344.0	335.8	318.3	280.3	214.8	113.0
DT 14-50	50	6"	22.00	30.00	3252	2.5"	136	103.0		408.9	399.3	377.8	333.5	254.8	121.0

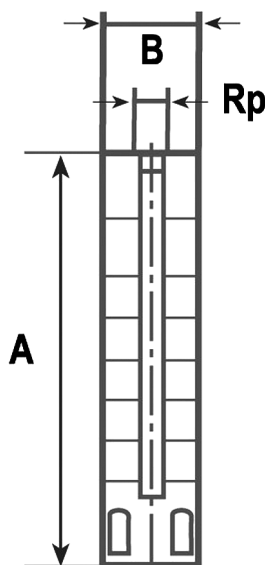


DYNATECH PUMPS

6" DT 14

6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

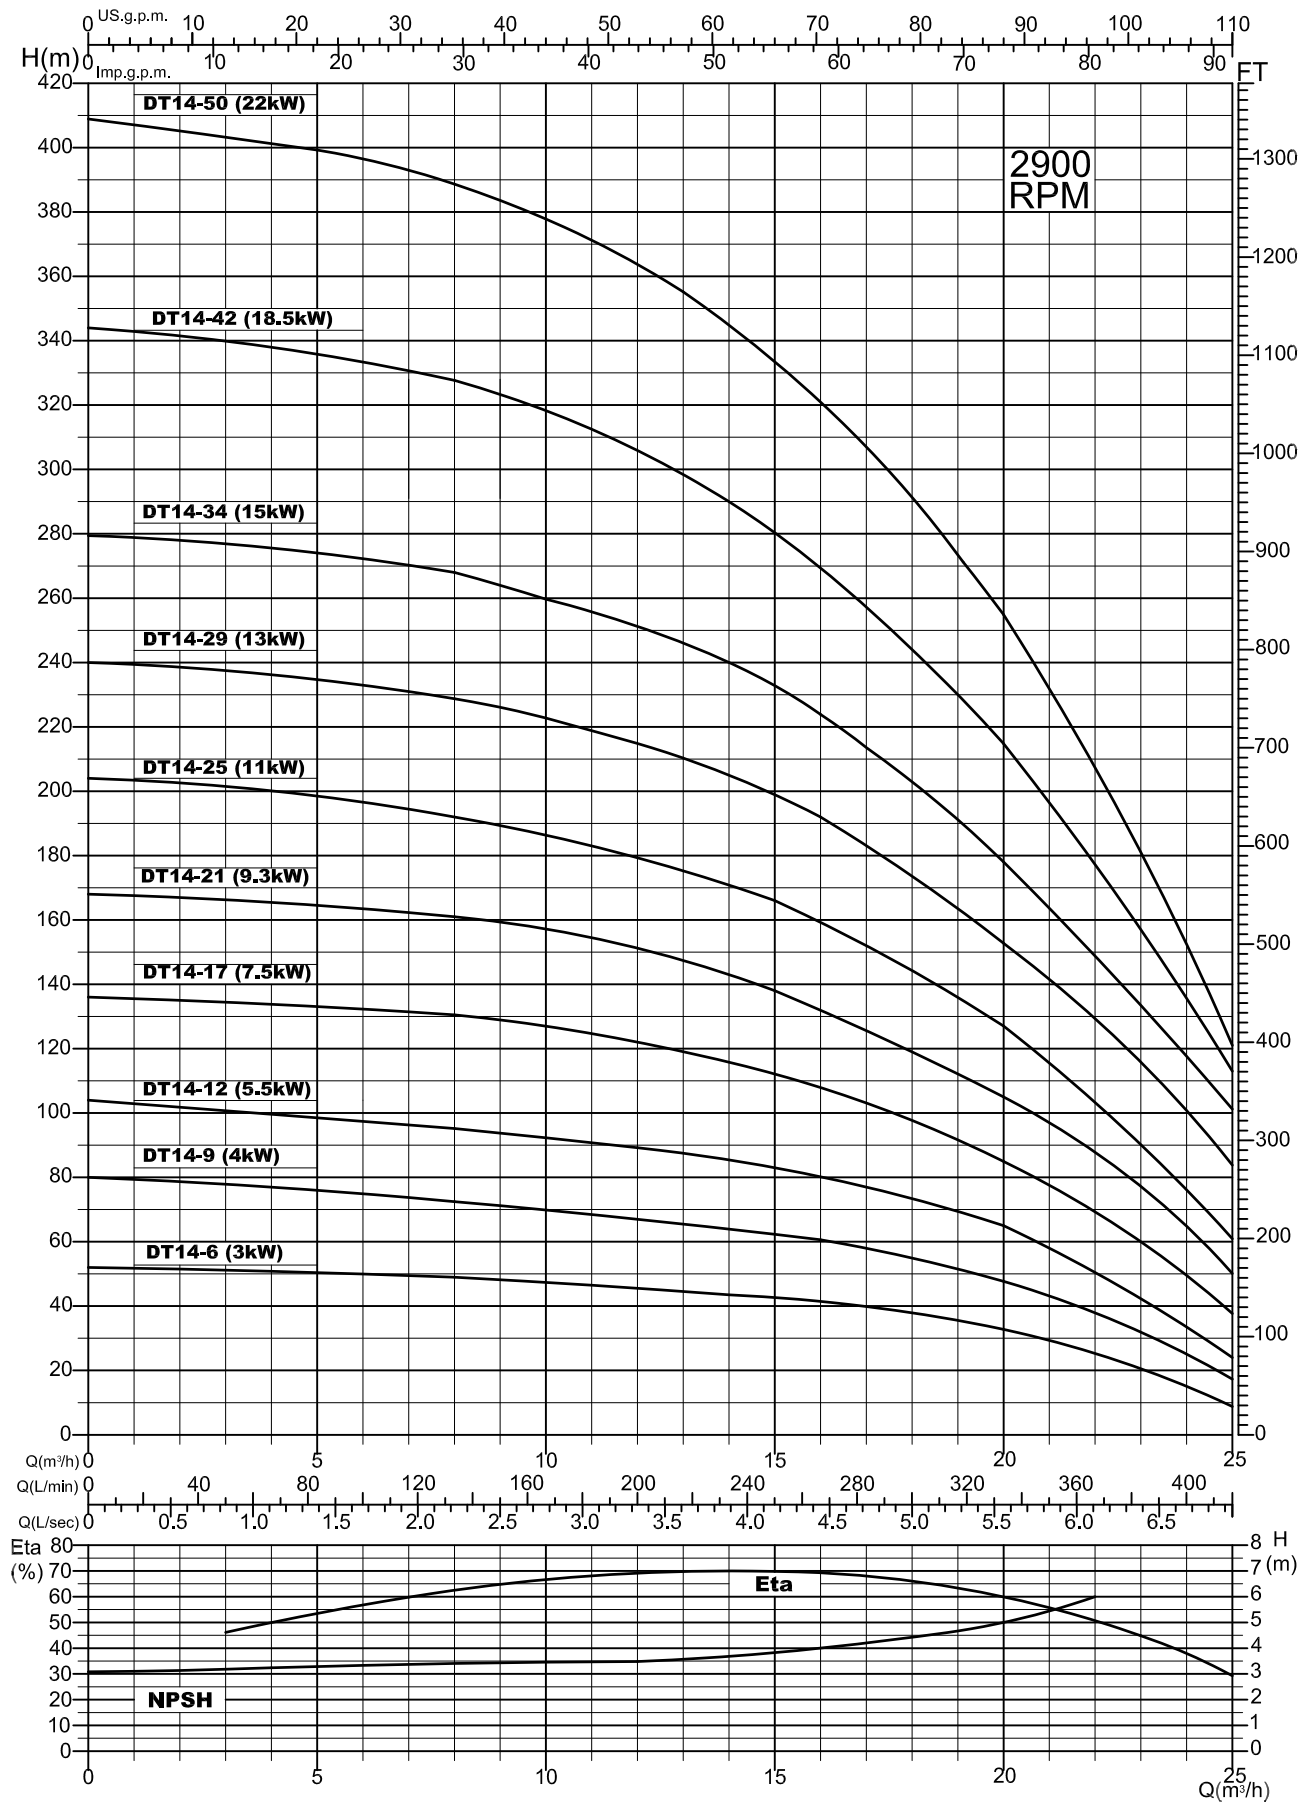

DYNATECH PUMPS

6" DT 20


6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

Performance/ Performances/ Prestaciones

- Maximum sand quantity in the water/ Max quantite de sable dans l'eau/
Maxima cantidad de arena en el agua - 200 g/m3
- Water temperature up to/ Temperature de l'eau jusqu' a/ Temperature del agua hasta - 50 degree Celcius
 - Connection/ Connexion/ Acoplamiento - NEMA Standards
- Impeller/ Roues/ Rodete - mixed flow/ helicocentrifuges/ semi axiales
- Installation/ Instalacion - horizontal and vertical/ horizontale and verticale

Type Tipo	N.Stages/ N.Etage/ N.Etapas	Motor/ Moteur			Pump/ Pompes/ Bombas				Q	Delivery/ Debit/ Caudal						
		Type Tipo	KW	HP	A (mm)	DN (RPT or NPT)	B (mm)	Kg		m3/h	0	10	15	20	25	30
										l/min	0	166.6	250	333	416.6	500
DT 20-4	4	4"	2.20	3.00	486	2.5"	136	12.0	H m Head/ Hauteurman/ Alturaman	39.2	36.1	32.1	25.4	18.7	6.1	
DT 20-5	5	4"	3.00	4.00	546	2.5"	136	14.0		48.9	45.2	39.6	31.5	20.9	7.7	
DT 20-6	6	4"	3.00	4.00	606	2.5"	136	16.5		58.7	54.2	47.5	37.9	25.1	9.2	
DT 20-7	7	4"	4.00	5.50	666	2.5"	136	18.0		68.5	63.7	56.1	44.8	29.8	10.8	
DT 20-8	8	4"/ 6"	5.50	7.50	726	2.5"	136	20.0		78.3	72.0	63.4	50.9	34.4	13.6	
DT 20-9	9	4"/ 6"	5.50	7.50	786	2.5"	136	22.0		88.1	81.0	71.3	57.4	38.9	15.7	
DT 20-10	10	4"/ 6"	5.50	7.50	846	2.5"	136	24.0		97.2	89.4	78.7	63.3	42.7	16.6	
DT 20-11	11	6"	7.50	10.00	912	2.5"	136	27.0		105.9	98.4	87.1	70.5	48.1	19.2	
DT 20-12	12	6"	7.50	10.00	972	2.5"	136	29.0		115.7	106.9	94.6	76.5	52.2	20.8	
DT 20-13	13	6"	7.50	10.00	1032	2.5"	136	31.0		125.0	115.8	102.5	83.1	56.7	22.3	
DT 20-14	14	6"	9.30	12.50	1092	2.5"	136	33.0		134.8	124.6	110.4	89.6	61.3	24.1	
DT 20-15	15	6"	9.30	12.50	1152	2.5"	136	35.0		146.9	132.8	118.6	96.3	65.5	24.4	
DT 20-17	17	6"	9.30	12.50	1272	2.5"	136	39.0		166.4	150.0	136.5	112.2	74.2	26.2	
DT 20-18	18	6"	9.30	12.50	1332	2.5"	136	41.0		176.2	157.0	141.7	117.5	78.0	28.0	
DT 20-19	19	6"	9.30	12.50	1392	2.5"	136	43.0		186.0	167.4	152.5	125.6	82.7	29.3	
DT 20-20	20	6"	11.00	15.00	1452	2.5"	136	45.0		195.8	175.6	158.8	129.8	84.6	30.8	
DT 20-21	21	6"	13.00	17.50	1512	2.5"	136	47.0		205.6	184.8	166.3	136.4	91.1	32.3	
DT 20-23	23	6"	15.00	20.00	1632	2.5"	136	51.0		224.0	199.9	183.0	152.0	100.0	36.0	
DT 20-24	24	6"	15.00	20.00	1692	2.5"	136	53.5		235.0	210.4	191.7	158.6	103.8	39.2	
DT 20-26	26	6"	15.00	20.00	1812	2.5"	136	57.5		254.5	227.8	207.5	171.9	111.8	42.3	
DT 20-28	28	6"	18.50	25.00	1932	2.5"	136	61.5		274.1	243.3	222.4	185.1	120.0	44.3	
DT 20-31	31	6"	18.50	25.00	2112	2.5"	136	67.5		303.5	269.4	245.7	204.9	133.0	47.7	
DT 20-33	33	6"	18.50	25.00	2232	2.5"	136	70.5		323.1	286.8	261.2	218.1	141.9	50.8	
DT 20-35	35	6"	22.00	30.00	2352	2.5"	136	75.5		342.7	305.3	277.3	231.3	150.3	53.9	
DT 20-38	38	6"	22.00	30.00	2532	2.5"	136	81.0		372.0	330.2	300.1	251.2	163.0	58.5	
DT 20-40	40	6"	22.00	30.00	2653	2.5"	136	85.5		395.0	351.0	317.7	266.0	177.0	61.6	
DT 20-43	43	6"	26.00	35.00	2832	2.5"	136	91.0		421.0	372.8	337.9	282.2	187.1	66.2	
DT 20-46	46	6"	26.00	35.00	3012	2.5"	136	97.0		450.8	395.5	355.4	296.5	197.3	71.3	

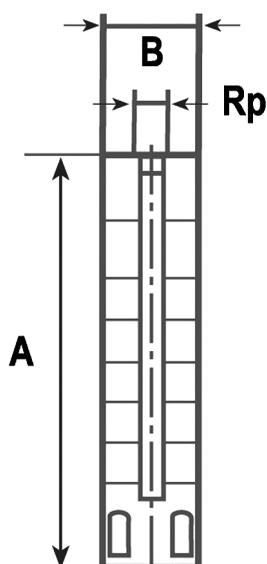


DYNATECH PUMPS

6" DT 20

6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

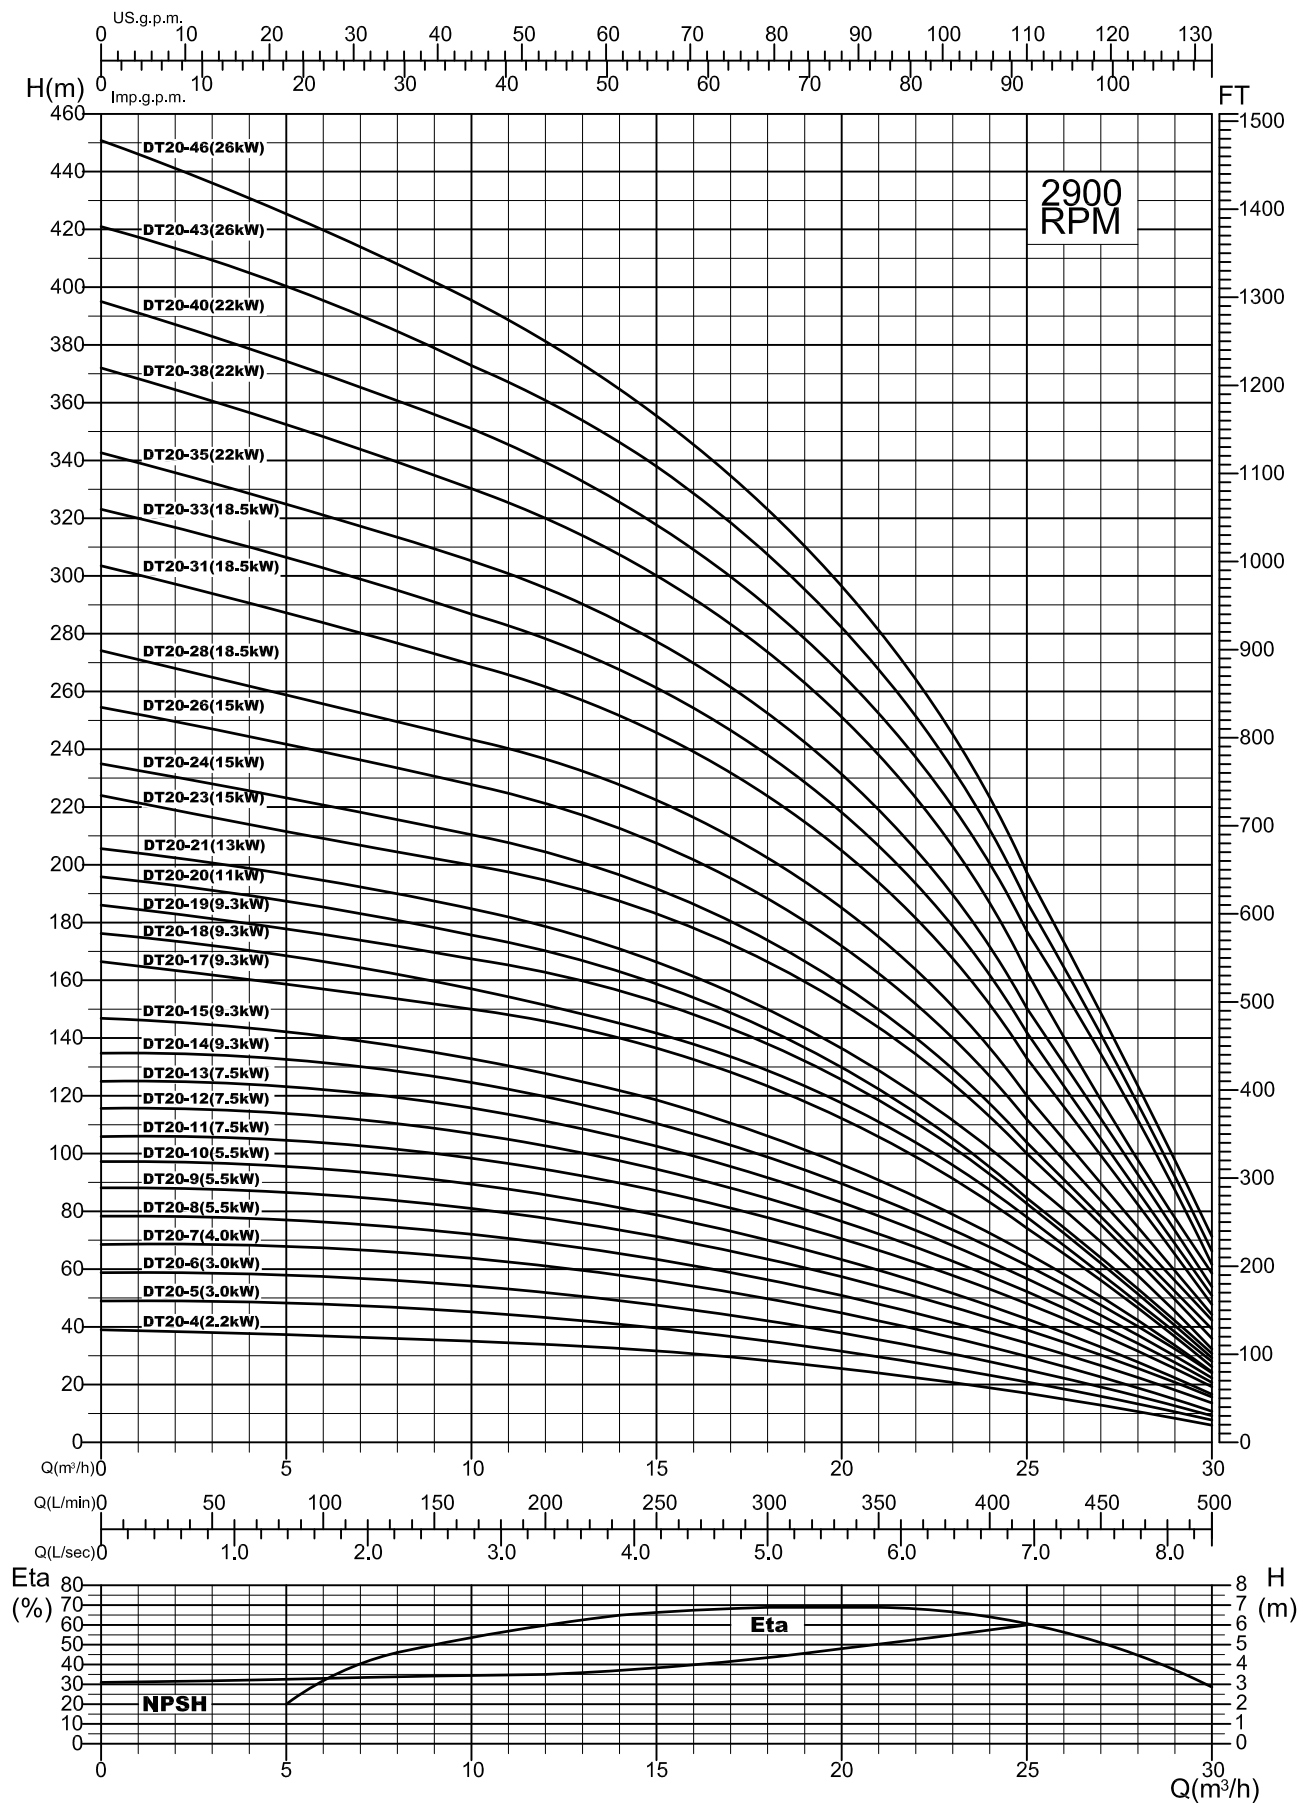

DYNATECH PUMPS

6" DT 30


6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

Performance/ Performances/ Prestaciones

- Maximum sand quantity in the water/ Max quantite de sable dans l'eau/
Maxima cantidad de arena en el agua - 200 g/m3
- Water temperature up to/ Temperature de l'eau jusqu' a/ Temperature del agua hasta - 50 degree Celcius
 - Connection/ Connexion/ Acoplamiento - NEMA Standards
- Impeller/ Roues/ Rodete - mixed flow/ helicocentrifuges/ semi axiales
- Installation/ Instalacion - horizontal and vertical/ horizontale and verticale

Type Tipo	N.Stages/ N.Etage/ N.Etapas	Motor/ Moteur			Pump/ Pompes/ Bombas				Q	Delivery/ Debit/ Caudal						
		Type Tipo	KW	HP	A (mm)	DN (RPT or NPT)	B (mm)	Kg	m3/h	0	10	20	25	30	35	40
									l/min	0	166.6	333	416.6	500	583	666
DT 30-3	3	4"	3.00	4.00	512	3"	136	13.0	H m Head/ Hauteurman/ Alturaman	34.4	33.0	29.1	26.4	23.0	19.0	14.5
DT 30-4	4	4"	4.00	5.50	595	3"	136	15.5		45.9	43.3	37.9	34.2	29.8	24.7	18.9
DT 30-5	5	4"/ 6"	5.50	7.50	678	3"	136	18.5		57.4	54.1	47.4	42.7	37.3	30.9	23.6
DT 30-6	6	4"/ 6"	5.50	7.50	761	3"	136	21.0		68.9	64.9	56.8	51.3	44.7	37.1	28.4
DT 30-7	7	6"	7.50	10.00	850	3"	136	25.5		80.0	75.3	65.9	59.5	51.8	42.9	32.8
DT 30-8	8	6"	7.50	10.00	933	3"	136	28.0		89.6	85.2	75.4	68.4	60.0	50.2	38.8
DT 30-9	9	6"	9.30	12.50	1016	3"	136	30.5		103.3	93.1	82.6	76.8	68.5	57.8	44.4
DT 30-10	10	6"	9.30	12.50	1099	3"	136	33.5		112.5	105.9	93.2	84.6	74.3	62.4	48.7
DT 30-11	11	6"	11.00	15.00	1182	3"	136	36.0		124.0	116.5	102.4	92.9	81.6	68.5	53.4
DT 30-12	12	6"	11.00	15.00	1265	3"	136	39.0		135.0	126.8	111.6	101.3	89.1	74.9	58.5
DT 30-13	13	6"	11.00	15.00	1348	3"	136	41.5		147.0	135.6	120.0	110.8	98.6	83.5	64.9
DT 30-14	14	6"	13.00	17.50	1431	3"	136	44.5		158.4	147.3	130.4	119.7	106.1	89.3	68.9
DT 30-15	15	6"	15.00	20.00	1514	3"	136	47.0		170.9	157.8	138.9	127.8	113.3	95.2	72.8
DT 30-17	17	6"	15.00	20.00	1680	3"	136	52.5		192.9	178.0	158.3	145.6	129.3	109.1	82.5
DT 30-18	18	6"	18.50	25.00	1763	3"	136	55.0		202.7	191.6	174.3	162.2	145.1	121.9	91.1
DT 30-21	21	6"	18.50	25.00	2012	3"	136	64.0		240.0	218.1	195.1	179.5	159.6	134.8	104.0
DT 30-22	22	6"	22.00	30.00	2095	3"	136	67.0		252.9	230.0	204.2	187.7	166.9	141.2	109.6
DT 30-23	23	6"	22.00	30.00	2178	3"	136	69.5		264.8	240.8	213.5	196.3	174.6	147.8	114.5
DT 30-26	26	6"	22.00	30.00	2427	3"	136	78.0		297.0	271.8	238.5	219.6	196.1	166.7	129.8
DT 30-28	28	6"	22.00	30.00	2593	3"	136	84.0		315.0	290.0	256.0	234.6	208.5	176.5	136.8
DT 30-30	30	6"	30.00	40.00	2759	3"	136	89.5		332.0	308.1	271.4	247.1	218.2	184.0	142.9
DT 30-31	31	6"	30.00	40.00	2842	3"	136	92.0		344.0	320.2	284.0	259.9	231.0	191.4	148.5
DT 30-32	32	6"	30.00	40.00	2925	3"	136	95.0		363.6	332.9	295.8	273.6	244.0	204.0	161.6
DT 30-34	34	6"	30.00	40.00	3091	3"	136	100.0		388.0	362.6	324.0	299.7	269.0	229.8	177.5
DT 30-40	40	6"	37.00	50.00	3589	3"	136	116.5		457.2	416.3	369.5	342.1	306.3	257.9	195.1

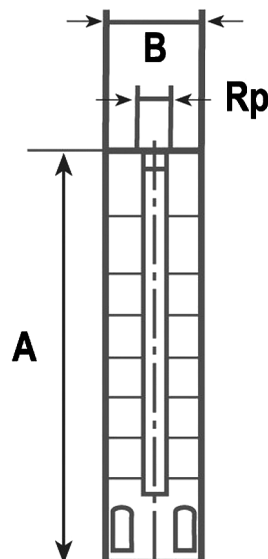


DYNATECH PUMPS

6" DT 30

6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

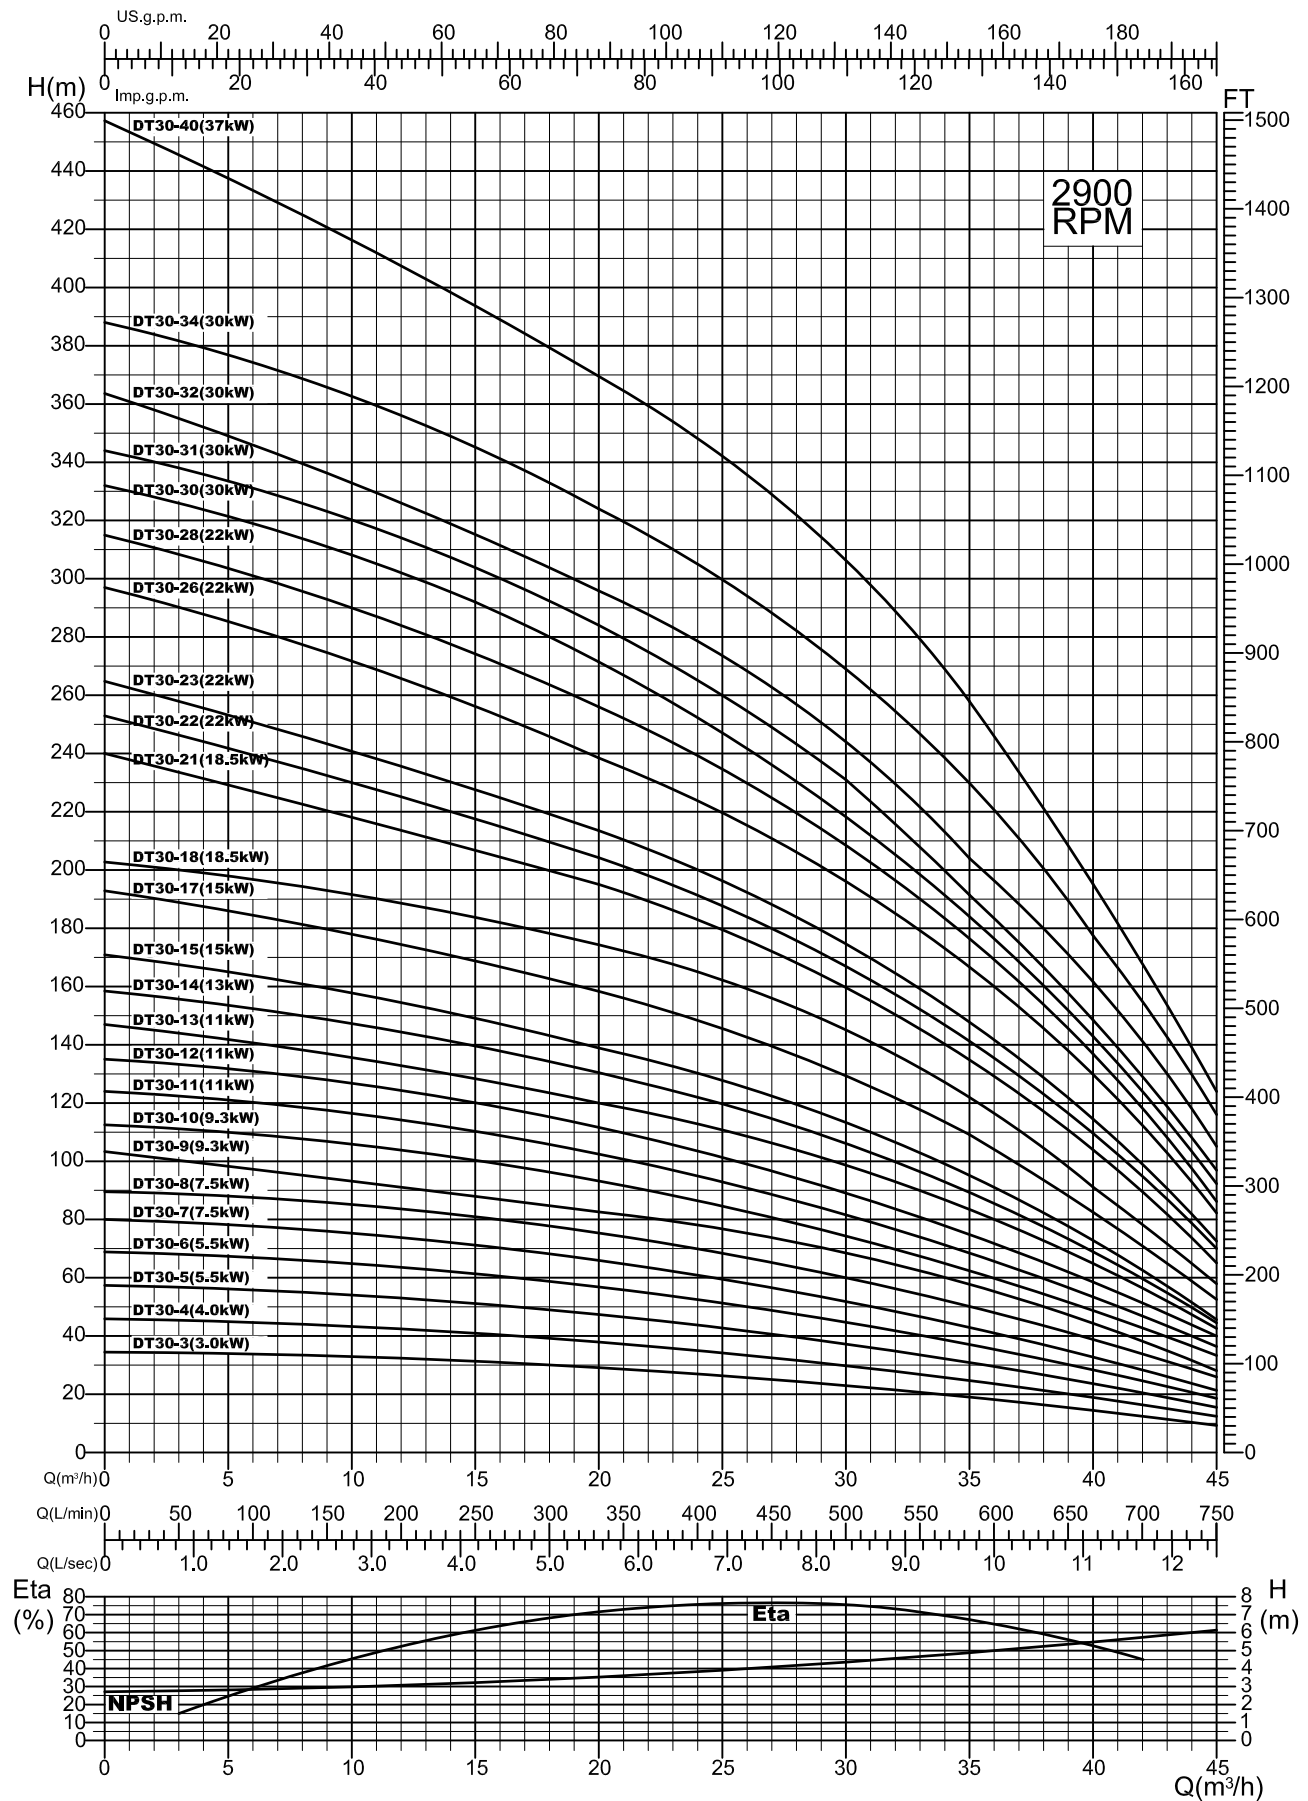

DYNATECH PUMPS

6" DT 46


6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

Performance/ Performances/ Prestaciones

- Maximum sand quantity in the water/ Max quantite de sable dans l'eau/
Maxima cantidad de arena en el agua - 200 g/m³
- Water temperature up to/ Temperature de l'eau jusqu' a/ Temperature del agua hasta - 50 degree Celcius
 - Connection/ Connexion/ Acoplamiento - NEMA Standards
- Impeller/ Roues/ Rodete - mixed flow/ helicocentrifuges/ semi axiales
- Installation/ Instalacion - horizontal and vertical/ horizontale and verticale

Type Tipo	N. Stages N. Etage N. Etapas	Motor/ Moteur			Pump/ Pompes/ Bombas				Q	Delivery/ Debit/ Caudal						
		Type Tipo	KW	HP	A (mm)	DN (RPT or NPT)	B (mm)	Kg	m3/h	0	10	20	30	40	50	60
									l/min	0	166.6	333	500	666	833	1000
DT 46-3	3	4"/ 6"	5.50	7.50	558	3"	144	16.0	H m Head/ Hauteurman/ Alturaman	46.0	44.2	41.3	37.4	32.5	22.9	6.6
DT 46-4	4	6"	7.50	10.00	652	3"	144	19.5		60.0	55.9	51.5	46.5	40.0	28.5	11.7
DT 46-5	5	6"	7.50	10.00	746	3"	144	23.0		72.7	70.1	65.7	58.0	48.2	34.3	13.6
DT 46-6	6	6"	9.30	12.50	840	3"	144	26.0		84.6	80.0	74.2	67.1	56.7	39.7	15.3
DT 46-7	7	6"	11.00	15.00	934	3"	144	29.5		99.3	93.4	86.4	78.0	64.8	45.0	17.0
DT 46-8	8	6"	13.00	17.50	1028	3"	144	33.0		110.5	104.9	97.5	88.1	74.8	52.8	20.3
DT 46-9	9	6"	15.00	20.00	1122	3"	144	36.0		121.7	116.0	108.7	99.8	84.8	60.6	23.6
DT 46-10	10	6"	15.00	20.00	1216	3"	144	39.5		136.0	129.9	122.0	111.8	94.0	66.5	24.6
DT 46-12	12	6"	18.50	25.00	1404	3"	144	46.0		166.0	156.8	145.4	131.5	110.3	78.5	29.6
DT 46-13	13	6"	22.00	30.00	1498	3"	144	49.5		174.0	167.5	156.6	141.0	119.0	85.2	30.5
DT 46-14	14	6"	22.00	30.00	1592	3"	144	53.0		183.5	177.5	167.0	151.7	128.5	91.8	33.0
DT 46-15	15	6"	22.00	30.00	1686	3"	144	56.0		194.0	189.7	179.5	162.7	138.0	97.0	35.0
DT 46-16	16	6"	26.00	35.00	1780	3"	144	59.5		210.0	201.6	190.1	173.0	145.6	102.6	38.4
DT 46-17	17	6"	26.00	35.00	1874	3"	144	63.0		226.1	215.1	200.7	182.6	153.9	108.2	41.8
DT 46-18	18	6"	30.00	40.00	1968	3"	144	66.5		238.4	228.0	214.9	194.3	163.1	116.3	43.0
DT 46-19	19	6"	30.00	40.00	2062	3"	144	69.5		250.6	243.0	227.4	205.1	173.1	124.5	44.3
DT 46-20	20	6"	30.00	40.00	2156	3"	144	73.0		262.3	254.0	240.8	222.1	190.0	133.0	48.0
DT 46-22	22	6"	37.00	50.00	2344	3"	144	79.5		290.0	279.7	263.9	241.8	205.7	142.2	50.4
DT 46-23	23	6"	37.00	50.00	2438	3"	144	83.0		298.0	289.7	275.8	255.5	219.7	151.0	54.0

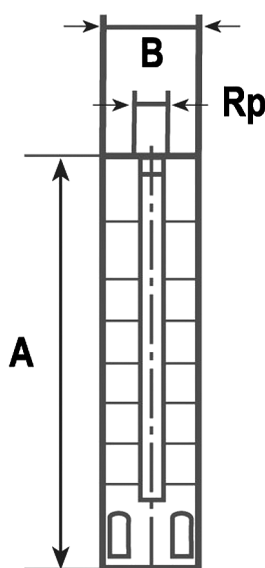


DYNATECH PUMPS

6" DT 46

6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

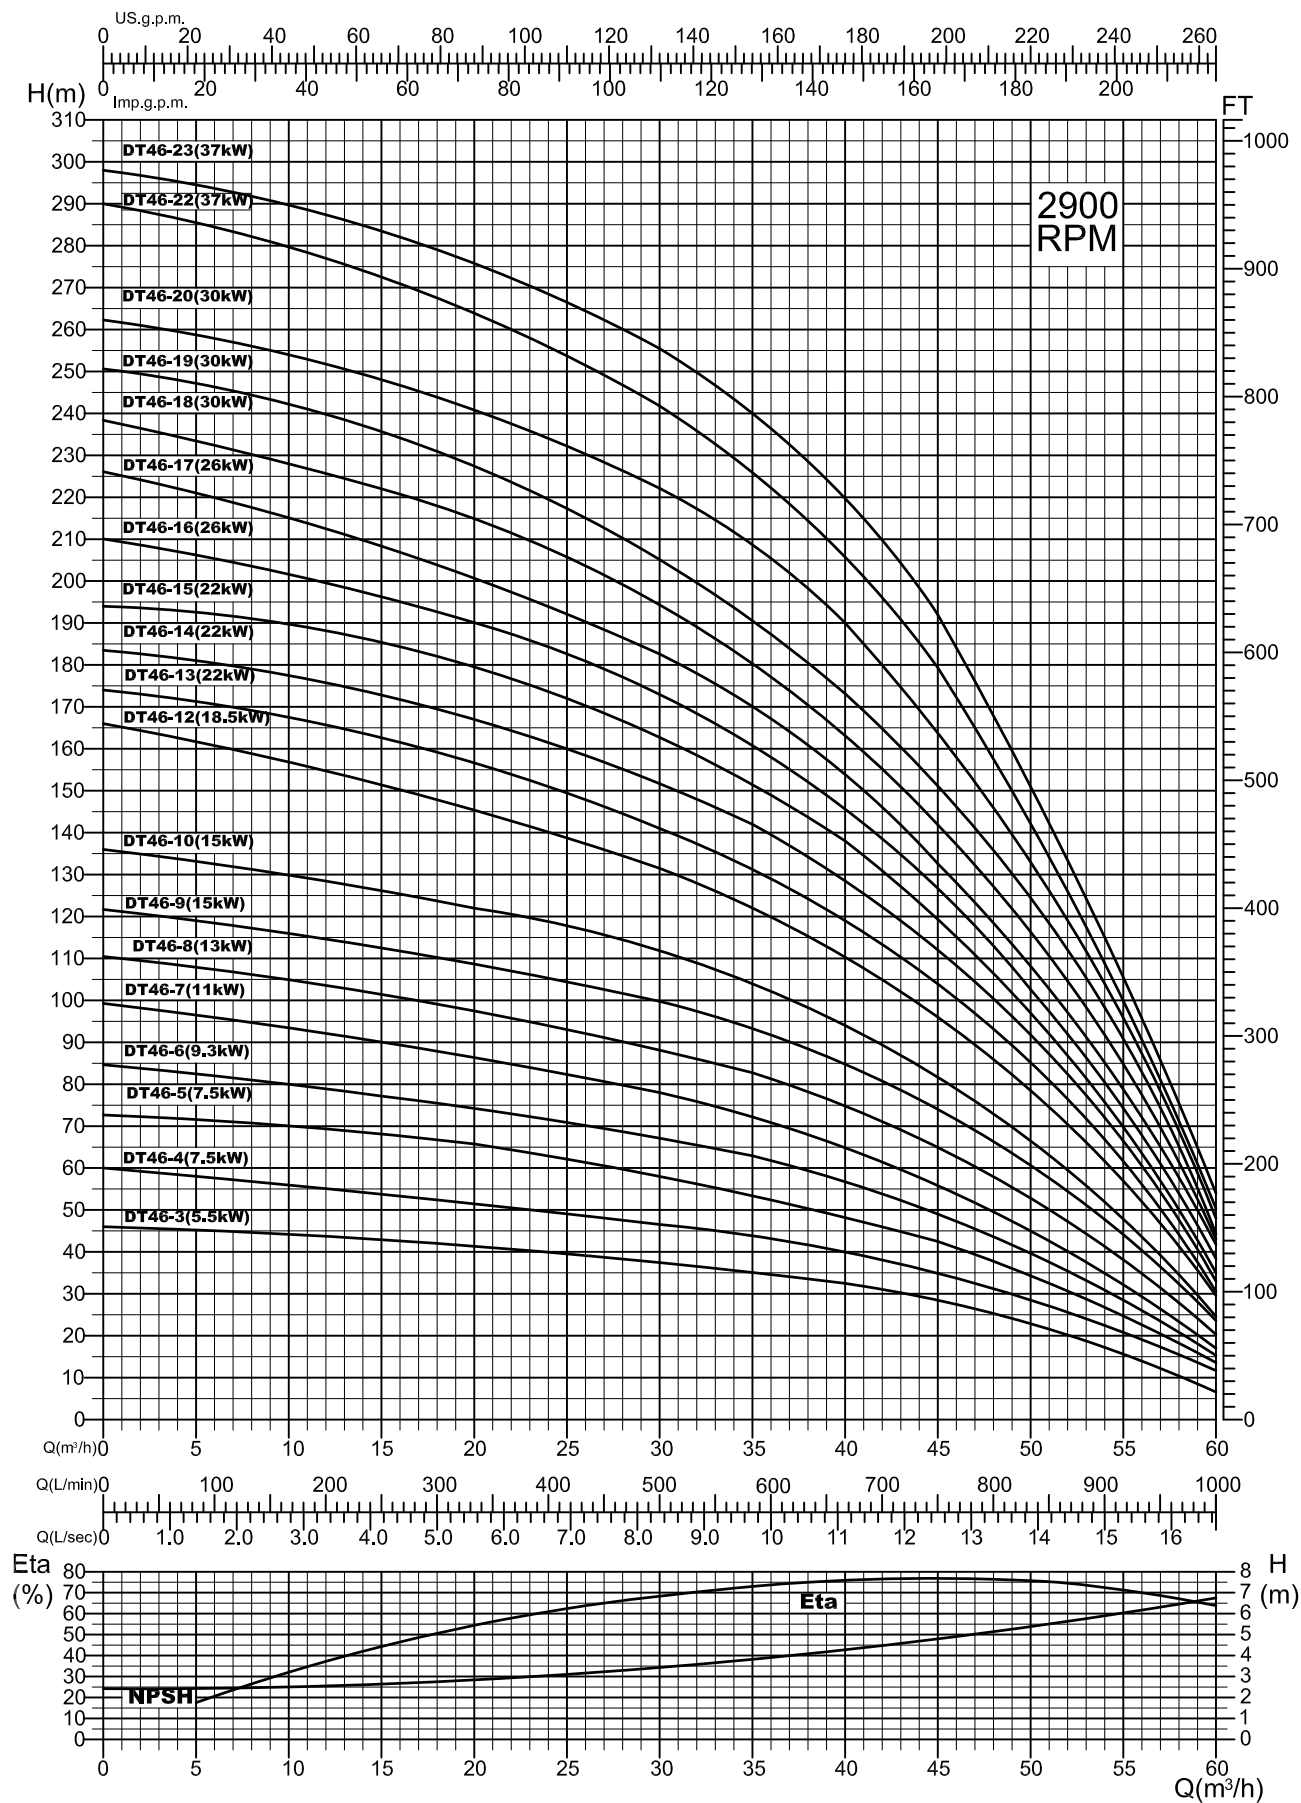

DYNATECH PUMPS

6" DT 60


6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

Performance/ Performances/ Prestaciones

- Maximum sand quantity in the water/ Max quantite de sable dans l'eau/
Maxima cantidad de arena en el agua - 200 g/m³
- Water temperature up to/ Temperature de l'eau jusqu' a/ Temperature del agua hasta - 50 degree Celcius
 - Connection/ Connexion/ Acoplamiento - NEMA Standards
- Impeller/ Roues/ Rodete - mixed flow/ helicocentrifuges/ semi axiales
- Installation/ Instalacion - horizontal and vertical/ horizontale and verticale

Type Tipo	N. Stages N. Etage N. Etapas	Motor/ Moteur			Pump/ Pompes/ Bombas				Q	Delivery/ Debit/ Caudal						
		Type Tipo	KW	HP	A (mm)	DN (RPT or NPT)	B (mm)	Kg	m3/h	0	20	30	40	50	60	70
									l/min	0	333	500	666	833	1000	1166
DT 60-3	3	4"/ 6"	5.50	7.50	558	3"	144	16.0	H m Head/ Hauteurman/ Alturaman	44.9	41.8	38.1	33.0	26.3	18.2	8.5
DT 60-4	4	6"	7.50	10.00	652	3"	144	19.5		58.2	54.0	49.6	43.5	35.9	26.6	15.5
DT 60-5	5	6"	9.30	12.50	746	3"	144	23.0		72.6	65.4	60.6	54.9	46.9	34.6	17.4
DT 60-6	6	6"	11.00	15.00	840	3"	144	26.0		87.0	77.3	71.7	65.5	56.5	42.1	21.2
DT 60-7	7	6"	13.00	17.50	934	3"	144	29.5		102.6	91.5	84.7	77.1	66.0	48.7	23.5
DT 60-8	8	6"	15.00	20.00	1028	3"	144	33.0		117.3	104.5	96.8	88.2	75.4	55.7	26.9
DT 60-9	9	6"	18.50	25.00	1122	3"	144	36.0		132.0	116.4	108.6	99.7	84.8	62.6	30.2
DT 60-10	10	6"	18.50	25.00	1216	3"	144	39.5		146.6	130.0	120.5	110.2	94.2	70.0	33.6
DT 60-11	11	6"	22.00	30.00	1310	3"	144	43.0		160.9	143.4	132.8	120.9	103.5	77.2	36.6
DT 60-12	12	6"	22.00	30.00	1404	3"	144	46.0		175.4	155.3	143.9	131.7	112.5	83.9	39.8
DT 60-14	14	6"	26.00	35.00	1592	3"	144	53.0		195.0	176.8	163.1	146.0	124.5	93.7	47.5
DT 60-15	15	6"	30.00	40.00	1686	3"	144	56.0		210.7	194.5	182.0	164.4	139.8	105.2	53.3
DT 60-16	16	6"	30.00	40.00	1780	3"	144	59.5		226.7	213.8	200.8	182.7	155.1	116.8	59.1
DT 60-18	18	6"	37.00	50.00	1968	3"	144	66.5		249.9	234.2	219.9	200.5	170.9	129.7	65.2
DT 60-19	19	6"	37.00	50.00	2062	3"	144	69.5		265.7	248.5	233.5	213.5	181.3	137.1	70.4
DT 60-20	20	6"	37.00	50.00	2156	3"	144	73.0		280.0	261.5	247.0	225.3	193.9	144.6	75.6

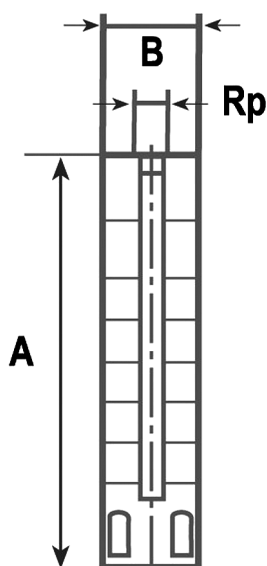

DYNATECH PUMPS

6" DT 60

6" Submersible Pumps
Pompes Immergees 6"
Bombas Sumergidas 6"

50 Hz - 2 poles - 2900 rpm

