



FIRST &
Trusted Since 2004

 **ROOFTOP** THIS SEE UP 270A/1%
ANTASIS 06 13 03

Commercial



Par 3 Golf & Café – Solo



Wisata Bahari Lamongan



Jepara Ourland Park – Jepara

Warehouse



Shoes Factory – West Java



Shoes Factory – West Java



Plastic Warehouse Industry - East Java

KEUNTUNGAN

- ❄️ Cooler environment without the need of additional insulation
- ☁️ Reduced noise during rain
- 🧪 Acid & Salt Resistant, WILL NEVER CORRODE
- 🔧 Lesser amount of Frame & Purlin needed
- ⚙️ Fast & easy installation (efficient)
- 🔧 Made of high quality uPVC with UV Protection
- ☀️ Available in two types: Doff/Opaque (Solid Color) & Semi-Transparent/Translucent (20% light permeability)

Factory



Export Textile Factory – Central Java

Education



St. Yisup Catholic school - Tropodo



Citraland - Surabaya

Residential




GOR Dojo KKI – Tambun, Bekasi



Battery Factory - West Java

TECHNICAL SPECIFICATIONS

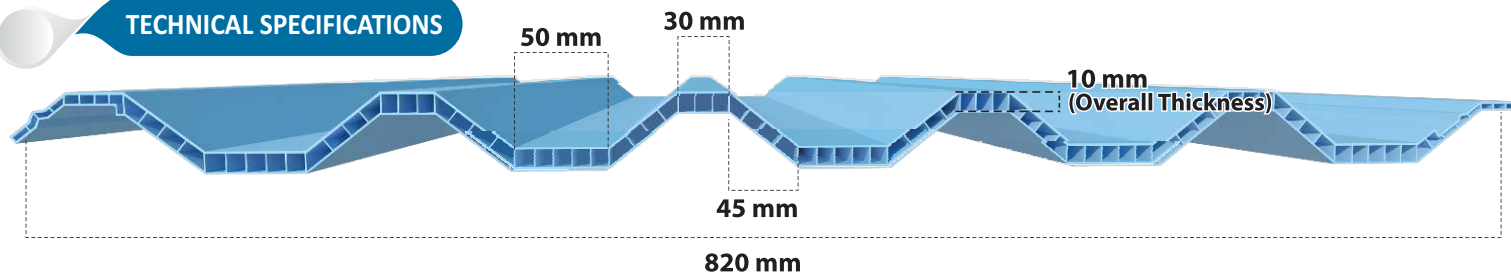

Effective width : 770 mm
Length (Max) : 12 M
Material : uPVC with UV Protection
Overall Thickness : 10 mm
Purlin distance/range : *1,2 M (max)

Roof Pitch : *15°
Weight : ± 4,2 kg/M¹ or 5,45 kg/M²
Type : - Doff/Opaque
- Semi-Transparent/Translucent
Color choice : Light Blue & White

***Recommended**

APPLICATION



SUPPORTING ACCESSORIES



Width : 350 mm
Length : 820 mm (effective 770 mm)
Color : White & Light Blue

1 TOP RIDGE



Width : 434 mm (Top) / 380 mm (Bottom)
Length : 6M¹
Color : White & Light Blue

2 GUTTER



Width : 453 mm (Top) / 390 mm (Bottom)
Color : White & Light Blue

3 GUTTER CONNECTOR



Width : 460 mm (Top) / 390 mm (Bottom)
Color : White & Light Blue

4 GUTTER END CAP

5 ROOFSEAL®



Roofseal®

Diameter : 32 mm
Color : White & Light Blue


INSTALLATION GUIDELINES

1

Prepare The Purlin/Range


Prepare the purlin:

- Ensure the purlin is in a straight and flat condition
- Draw a straight line before installing the roof

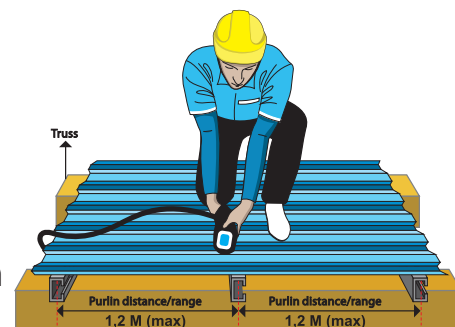

Roof Pitch:


- The minimum roof pitch is 15°

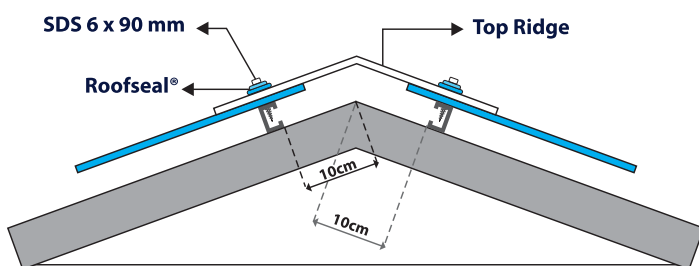

The maximum distance between the first purlin from the Truss' midpoint is 10 cm Pitch 15°

Roof Pitch



2



3

Assemble Rooftop

Assemble Rooftop® by using the interlock system

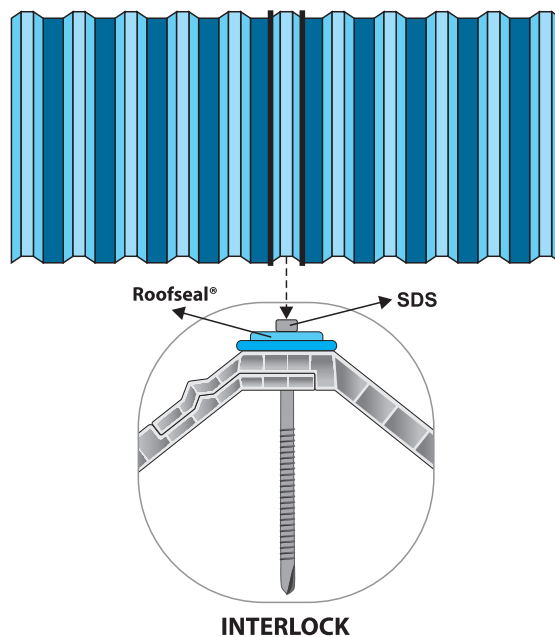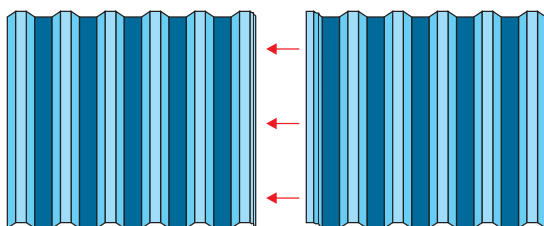


PETUNJUK INSTALASI

4

Install SDS


Install SDS by following the picture below
(1 M² requires 4 SDS & 4 Roofseal®).

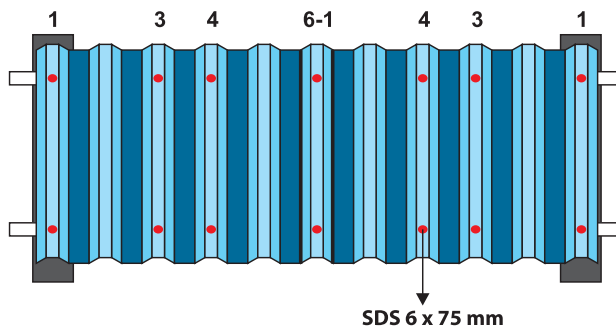

5

Overlap Length



Overlap length (if present) is 30 cm.

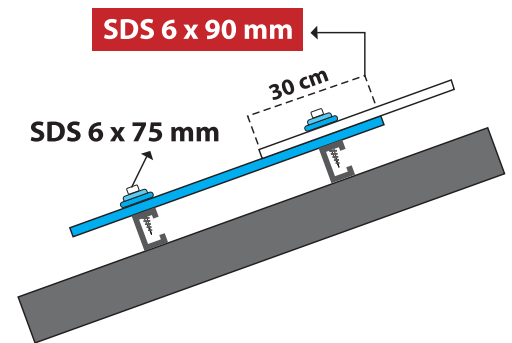

6


Install Rain Gutter & Gutter Connector

Install rain gutter and gutter connector according to the picture below

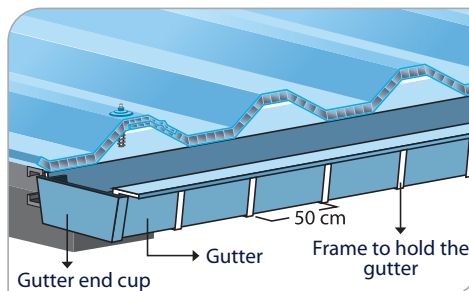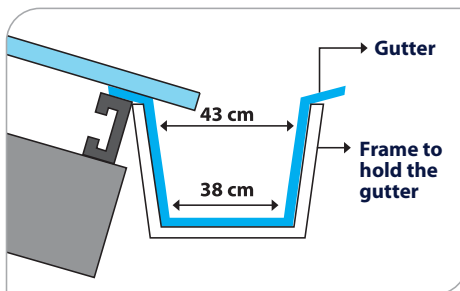

7

Application of Curved Roof

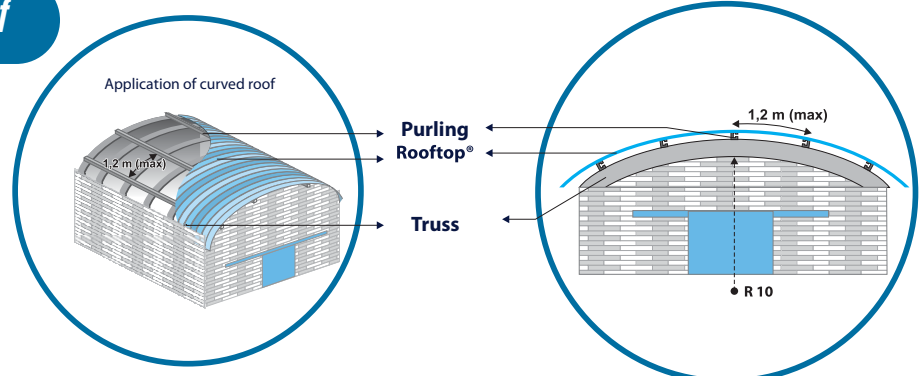

FIRST & TRUSTED SINCE 2004



PT. SUMBER DJAJA PERKASA
PLASTIC INDUSTRY - SIDOARJO, INDONESIA

FACTORY

Raya Pilang KM 8 No. 88 Kec. Wonoayu, Sidoarjo 61273. Phone: (031) 88.555.88. Fax: (031) 88.557.99

SHOWROOM

SURABAYA: Kembang Jepun 94, Surabaya 60162. Phone: (031) 353.9900. Fax: (031) 353.1189

JAKARTA: Mutiara Taman Palem B3 No. 17 Cengkareng Timur, Jakarta Barat 11730. Phone: (021) 2902.4576

ROOFTOP® product come with warranty up to 15 years, to learn more about the warranty details, term and conditions, please kindly check document titled "SYARAT JAMINAN GARANSI ROOFTOP" on www.rooftop.co.id

ROOFTOP® is a registered trademark of PT. SUMBER DJAJA PERKASA

