


Mailer Box ASSEMBLY INSTRUCTIONS - TWO SIDED PRINTING

1. Print on 8.5 x 11 paper in portrait mode; print two-sided so that the front and inside front are on the same end of the page.
2. Cut on all solid **dark blue** lines.
3. Fold and then unfold each dashed **red** line toward the unprinted side of the sheet (the inside of the box). For easiest assembly, fold in the order of the numbers in red.
4. With the bottom panel facing down, fold up the facing front flap and the back. Tuck in the left side flaps as you fold the left side wall up and over them. The left side wall will lock into the slit on the inside bottom. Repeat this step with the right side.
5. Tuck the dust flaps to the inside of the box as you fold the front over the front facing flap. Tuck the lock tabs into the outside of the sidewalls. You've assembled your mailer box!

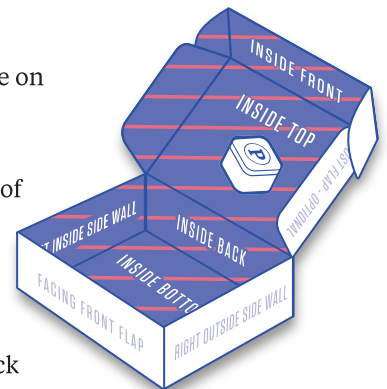

INSIDE FRONT

INSIDE TOP



INSIDE BACK

SIDE WALL
(hidden)

INSIDE BOTTOM

SIDE WALL
(hidden)

INSIDE FACING FRONT FLAP