


Precision LED Flood Lighting

Model	Wattage	VEET	IPART	Lumens	Beam Angle	Colour	Warranty
LPTF500-15	500	TBA	TBA	56,500	15 Degree	5,000k	3 Years *
LPTF500-30	500	TBA	TBA	77,400	30 Degree	5,000k	3 Years *
LPTF800-15	800	TBA	TBA	97,500	15 Degree	5,000k	3 Years *
LPTF800-30	800	TBA	TBA	126,700	30 Degree	5,000k	3 Years *
LPTF1000-15	1000	TBA	TBA	116,730	15 Degree	5,000k	3 Years *
LPTF1000-30	1000	TBA	TBA	157,000	30 Degree	5,000k	3 Years *

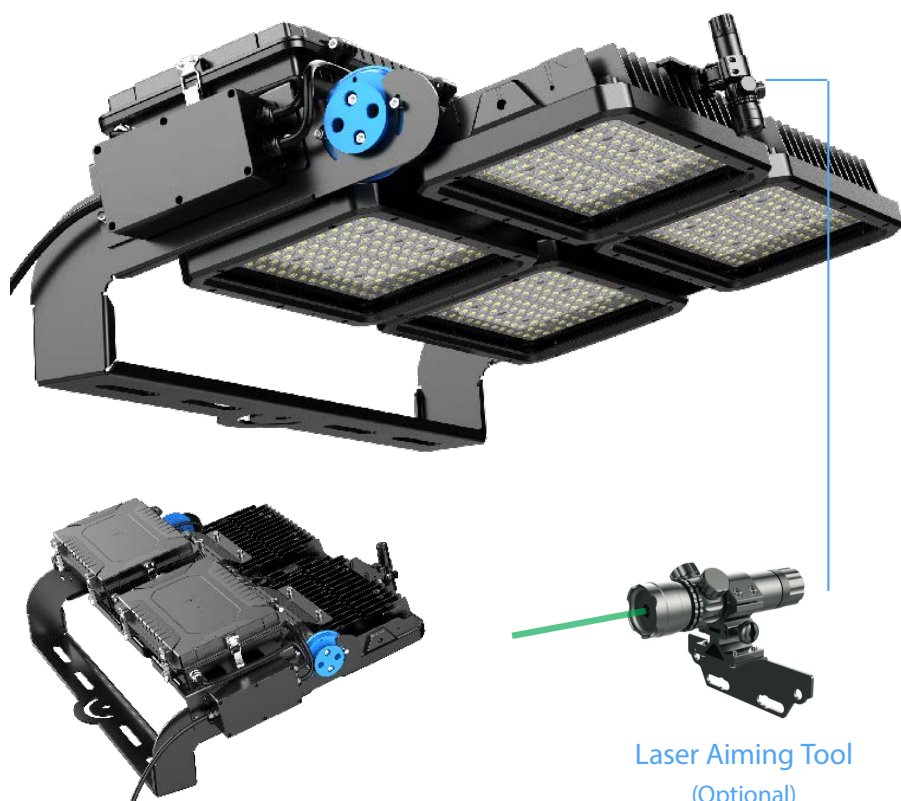

Laser Aiming Tool
(Optional)

Features & Benefits

- Precision LED flood Lighting
- MeanWell Driver
- Lumiled chip base
- Excellent heat dispensation
- IP65 rated
- Very high lumen output
- Extruded aluminum body
- 50,000 + average life hours
- Robust and sturdy design
- 3 year warranty (*5 year option)
- Lumiled chip base
- 15 & 30 degree beam angle
- Available in 3 different sizes
- Laser aiming tool (Option)
- DALI & Dimmable (Option)



Technical Specifications

Voltage AC100 - 277V	Wattage MIXED	Power Factor 0.95	Beam Angle 15° & 30°	Colour 5,000K	Life Cycle 50, 000+
IP Rating IP65	VEET/ESS/REES TBA	CRI >70	Diffused No	Dimmable Option	Heat Rating -20°c to +45°c


TITAN

Precision LED Flood Lighting

Dimensions & Weight

Model	Length	Width	Depth	Weight
LPTF500-15/30	669mm	403mm	326mm	24 kg's
LPTF800-15/30	669mm	773mm	326mm	40 kg's
LPTF1000-15/30	669mm	773mm	326mm	40 kg's

500w

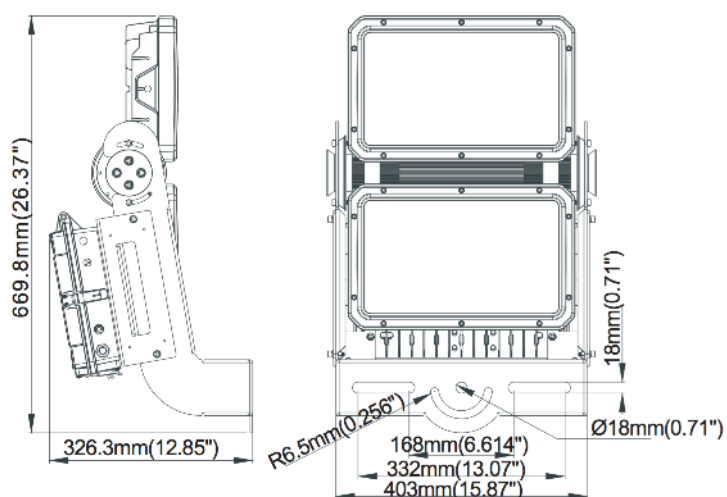

800 - 1000w

