




SEALSKIN COVERS

ULTRA TOUGH COVERS, MANUFACTURED DIRECT



STEP 1

Make sure your vehicle is clear of any dust or dirt particles, so they do not get trapped in between the cover and your vehicle surface.

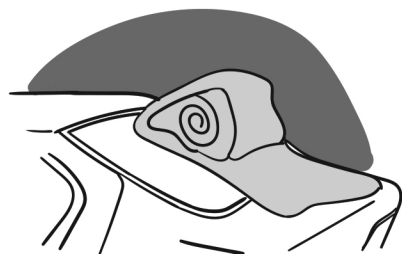

STEP 2

Carefully remove your SealSkin Cover from the carrying case on the top of your vehicle with the front of the cover facing the front of your vehicle, being careful it does not touch the ground. We suggest beginning towards the rear of your vehicle.




STEP 3

Slowly unroll the cover down the middle of the vehicle towards the back and cover the rear of the car making sure the edge of the cover is under the bumper.


STEP 4

Now, roll the front of the cover towards the hood of your vehicle unrolling the side as you move forward. Do the same for the other side of your vehicle.

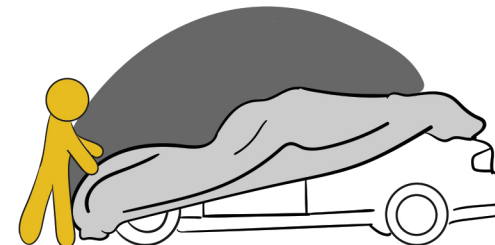

STEP 5

Pull the front edge of the cover underneath your front bumper. Adjust the cover where needed to ensure that all areas are covered.

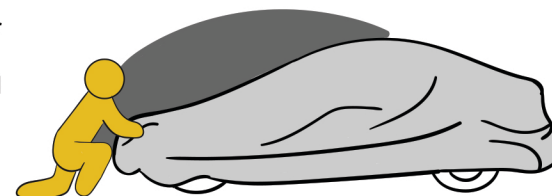

STEP 6

Use the strap and buckle clips underneath your vehicle to secure the cover and ensure that it does not move around or get blown away. Adjust where necessary.



Follow installation instructions carefully to avoid your cover getting dirty, scratched or ripped. Used covers are ineligible for returns and exchanges.

FOR MORE INFORMATION VISIT:

www.sealskincovers.com/pages/returns-exchange-policy

Store product in a dry place.

WARNING: Keep plastic bags away from children and pets.
Use as intended. Do not use as a toy.



MADE IN CHINA -
BROUGHT TO YOU BY
CALIFORNIA