


REPLICAT ARTWORK SPECIFICATIONS - 120 mm DISC (AUDIO CD & ROM)

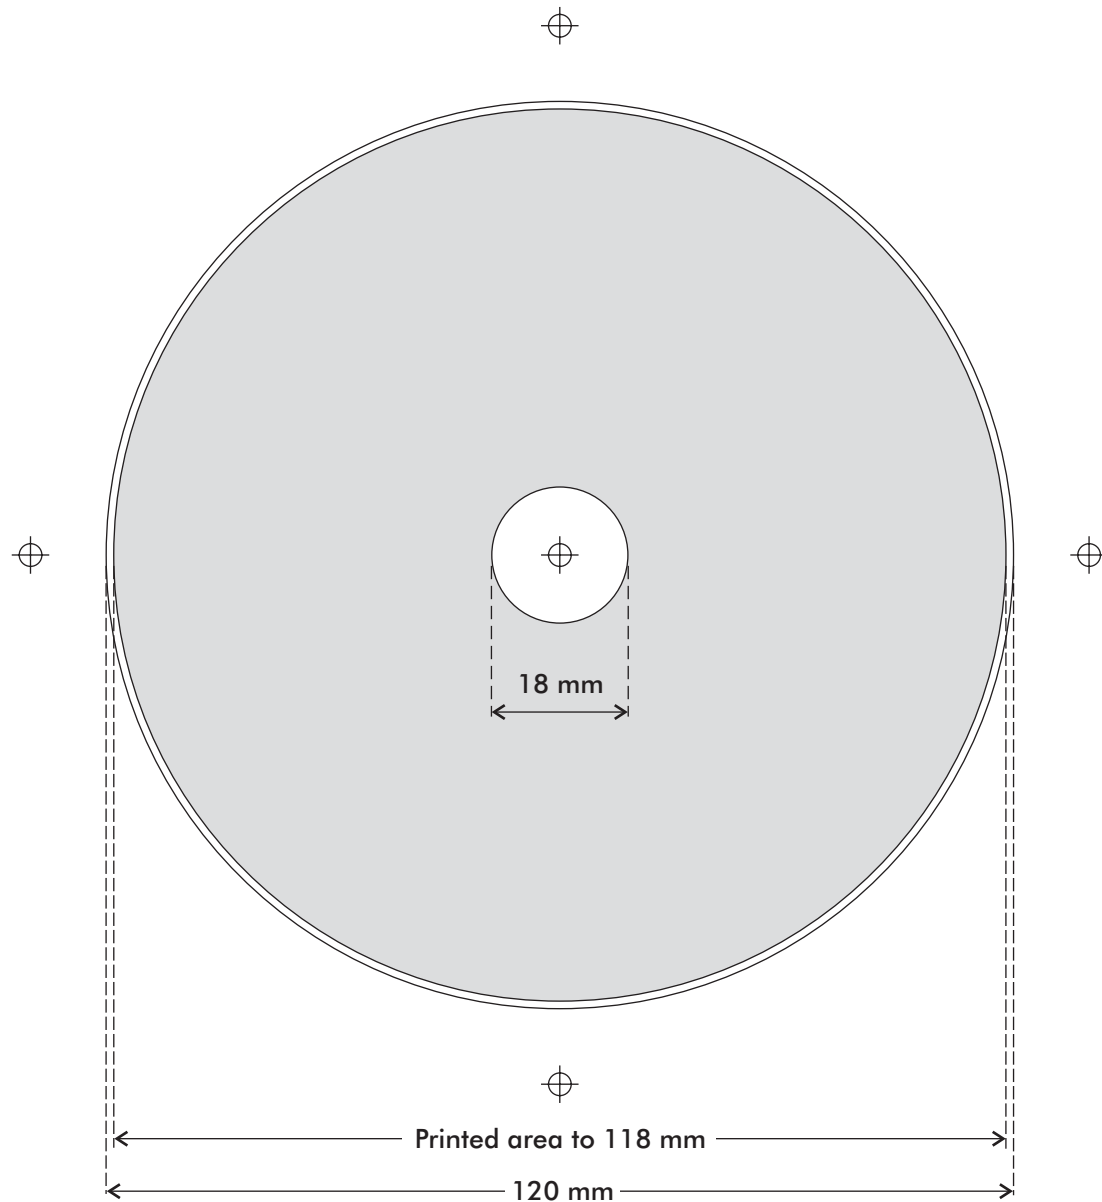

■ Shading denotes printable area

⊕ Registration marks at 70 mm and at 90 degrees from centre of disc

Instructions for disc label artwork preparation:

- Keylines must be deleted and artwork must not have bleed
- Registration marks (cross hairs) must be added to your artwork as per the diagram (see left)
- Text should have a minimum 0.3mm letter spacing (tracking) and be no smaller than 5 point, reversed text should be no smaller than 6 point (eg: 6 point type). These text sizes are based on Helvetica Regular.
- Minimum line width should be no less than 0.2 mm , and no less than 0.3mm reversed.
- Films are output at the production plant. Please do not supply.
- A professional digital proof (e.g. EPSON9000, Sherpa) is essential for colour accurate CMYK printing. We can provide this for your approval once you supply your artwork files.
- A colour printout showing the PMS colour numbers to be used is required for all Pantone colour printing.

Please refer to the Replicat *Step-by-Step* guide to materials preparation (STEP 2: Artwork Disc) for:

1. Accepted file formats
2. General instructions for artwork preparation
3. Tips for successful disc label printing

The Replicat *Step-by-Step* guide is generally supplied with all quotations and can also be downloaded at www.replicat.com.au (ORDER FAQ page).

Please call Replicat customer service for any assistance on 1300 727 685 or sales@replicat.com.au