

iJOINT –

Compression fittings



The iJOINT focuses on safety and ergonomic handling – real benefits for our customers


The new line of compression fittings from GF Piping Systems has been specially developed for use in water systems, assuring a quicker and easier installation compared to a traditional compression fitting. The lip sealing system makes this product both unique and long-lasting. Superb quality and innovative features predestine iJOINT for the drinking water market worldwide. iJOINT comprises all the benefits of plastics: no rust and no incrustation, lightweight construction, no leakage, excellent pressure resistance – just to name a few. To sum it up: iJOINT provides an excellent cost-benefit ratio with a life cycle of at least 50 years.

+ Features



iJOINT – the next generation of polypropylene compression fittings

+ Benefits

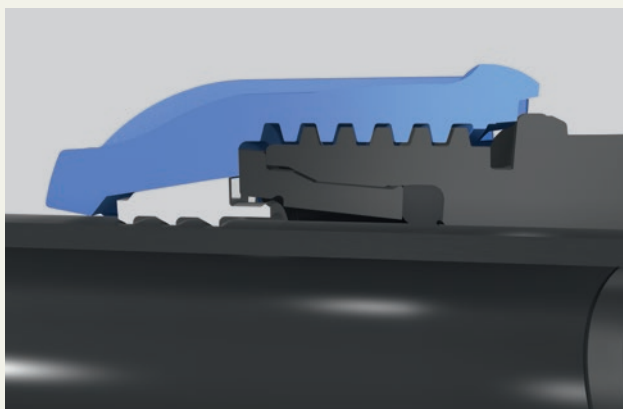

iJOINT is the result of GF Piping Systems' unrelenting commitment to continuous improvement and a culture based on innovation and ingenuity. The innovative design provides essential benefits like fast, forgiving and effort-free installation methods in challenging trench and weather situations, ensuring maximum lifetime and high flow capacity for top performance in water applications. The iJOINT range contains straight and reducing joiners, tees, elbows, threaded connectors, end caps and metal transition adaptors ranging from d20 to d110 mm.

Fast and easy installation

iJOINT comes ready for installation, if necessary unscrew the nut to obtain a very easy pipe insertion. Installation of bigger dimensions is even easier due to the fact, that there is no contact between the clamp ring and the pipe during insertion. No special tools or equipment are required for the installation.

Lip gasket

The special lubricated NBR lip gasket allows a smooth pipe insertion even without pre-lubrication of the pipe. The special lip profile provides outstanding hydraulic performance even in case of ovalized, scratched or undersized pipes.



Safe design and long life time

The special design in combination with the use of top quality raw materials enables high pressure and pull-out resistance throughout the complete range, also in case of water hammer. The grip ring is biting the pipe granting a high pull out resistance and the thrust ring is pushing the lip gasket towards the pipe for a perfect sealing resistance.

Conformity to all important standards and availability in a wide range of diameters makes iJOINT your first choice

iJOINT compression fittings are suitable for use with all types of polyethylene pipes PE 80, PE 100, PEX and PVC-U with special transition kit. The fitting is ready to be installed out of the box without any preparation. The pipe can be inserted directly without disassembling the fitting. There is a 16 bar resistance throughout the complete range of iJOINT fittings, with approvals according to the most stringent regulations worldwide. The special lip gasket grants a perfect performance even with ovalised, scratched and undersized pipes.

+ Technical specifications

<div>From ø 20 to 63</div> 	<table><tr><td>Pressure range</td><td>MOP of 16 bar for the complete range of iJOINT fittings from d20 to d110 mm (complete range DVGW approved PN16)</td></tr><tr><td>Temperature range</td><td>-10 °C to +45 °C</td></tr><tr><td>Materials</td><td>Body and thrust ring UV stabilized polypropylene impact Copolymer with high long term aging stability complying with ISO 9080. Nut UV stabilized blue polypropylene Impact Copolymer Clamp ring Polyacetal (POM) Lubricated lip gasket Food-safe NBR rubber suitable for potable water. Reinforcement ring (for female thread) Stainless steel AISI 430</td></tr><tr><td>Regulation for drinking water</td><td>iJOINT compression fittings comply with the strictest worldwide regulations, e.g.: – DVGW GW 335-B3 – W270 and KTW (Germany) – ATA (Netherlands) – DM 174-06/04/2004 (Italy) – Global Mark (Australia) – ACS (France)</td></tr><tr><td>Approvals</td><td>– DVGW (Germany) – IIP (Italy) – SVGW (Switzerland) – KIWA (Netherlands) – ACS (France) – Global Mark (Australia)</td></tr><tr><td>Standards</td><td>For PE pipes: DIN EN 12201; ISO 11922-1; DIN 8074; EN 12201-1/2; AS/NZS 4130; BS 6572; BS 6730; ISO 4427; UNI 7990; ISO 12162 Threads DIN EN 10226 (ISO 7-1); BS 21; AS 1722.1 Flanges DIN EN1092-1; DIN 2501.1</td></tr><tr><td>Test standards</td><td>ISO 14236; DIN 8076-3; AS/NZS 4129; BRL K534/03 –UNI; ISO 3501; ISO 3503; ISO 3458; ISO 3459; VP609</td></tr></table>	Pressure range	MOP of 16 bar for the complete range of iJOINT fittings from d20 to d110 mm (complete range DVGW approved PN16)	Temperature range	-10 °C to +45 °C	Materials	Body and thrust ring UV stabilized polypropylene impact Copolymer with high long term aging stability complying with ISO 9080. Nut UV stabilized blue polypropylene Impact Copolymer Clamp ring Polyacetal (POM) Lubricated lip gasket Food-safe NBR rubber suitable for potable water. Reinforcement ring (for female thread) Stainless steel AISI 430	Regulation for drinking water	iJOINT compression fittings comply with the strictest worldwide regulations, e.g.: – DVGW GW 335-B3 – W270 and KTW (Germany) – ATA (Netherlands) – DM 174-06/04/2004 (Italy) – Global Mark (Australia) – ACS (France)	Approvals	– DVGW (Germany) – IIP (Italy) – SVGW (Switzerland) – KIWA (Netherlands) – ACS (France) – Global Mark (Australia)	Standards	For PE pipes: DIN EN 12201; ISO 11922-1; DIN 8074; EN 12201-1/2; AS/NZS 4130; BS 6572; BS 6730; ISO 4427; UNI 7990; ISO 12162 Threads DIN EN 10226 (ISO 7-1); BS 21; AS 1722.1 Flanges DIN EN1092-1; DIN 2501.1	Test standards	ISO 14236; DIN 8076-3; AS/NZS 4129; BRL K534/03 –UNI; ISO 3501; ISO 3503; ISO 3458; ISO 3459; VP609	<div>From ø 75 to 110</div> 
Pressure range	MOP of 16 bar for the complete range of iJOINT fittings from d20 to d110 mm (complete range DVGW approved PN16)															
Temperature range	-10 °C to +45 °C															
Materials	Body and thrust ring UV stabilized polypropylene impact Copolymer with high long term aging stability complying with ISO 9080. Nut UV stabilized blue polypropylene Impact Copolymer Clamp ring Polyacetal (POM) Lubricated lip gasket Food-safe NBR rubber suitable for potable water. Reinforcement ring (for female thread) Stainless steel AISI 430															
Regulation for drinking water	iJOINT compression fittings comply with the strictest worldwide regulations, e.g.: – DVGW GW 335-B3 – W270 and KTW (Germany) – ATA (Netherlands) – DM 174-06/04/2004 (Italy) – Global Mark (Australia) – ACS (France)															
Approvals	– DVGW (Germany) – IIP (Italy) – SVGW (Switzerland) – KIWA (Netherlands) – ACS (France) – Global Mark (Australia)															
Standards	For PE pipes: DIN EN 12201; ISO 11922-1; DIN 8074; EN 12201-1/2; AS/NZS 4130; BS 6572; BS 6730; ISO 4427; UNI 7990; ISO 12162 Threads DIN EN 10226 (ISO 7-1); BS 21; AS 1722.1 Flanges DIN EN1092-1; DIN 2501.1															
Test standards	ISO 14236; DIN 8076-3; AS/NZS 4129; BRL K534/03 –UNI; ISO 3501; ISO 3503; ISO 3458; ISO 3459; VP609															

The comprehensive iJOINT system is ideal for new installations as well as renovations or extensions of existing water lines

iJOINT is designed for use in house connections and service lines. This wide-ranging system lends itself to new installations as well as to renovation or extension work on existing water lines. iJOINT can be used for diverse applications and its design benefits a vast number of industries. In addition, iJOINT is the perfect solution for bypass systems, where temporarily laid lines need to be disassembled in a quick and easy way.

+ Applications



Water Distribution Lines



House Connections



High-end Irrigation



1

- Water Distribution Lines
- House Connections and Service Lines
- Pressure Sewage

2

- Industrial Applications
- Mining Industry

3

- Leisure Parks
- Golf Courses
- Camping Grounds

4

- Farming
- Greenhouses
- High-end Irrigation

Worldwide at home

Our sales companies and representatives ensure local customer support in over 100 countries.

www.gfps.com

Argentina/Southern South America

Georg Fischer Central Plastics
Sudamérica S.R.L.
Buenos Aires, Argentina
Phone +54 11 4512 02 90
gfccentral.ps.ar@georgfischer.com
www.gfps.com/ar

Australia

George Fischer Pty Ltd
Riverwood NSW 2210 Australia
Phone +61 (0) 2 9502 8000
australia.ps@georgfischer.com
www.gfps.com/au

Austria

Georg Fischer Rohrleitungssysteme GmbH
3130 Herzogenburg
Phone +43 (0) 2782 856 43-0
austria.ps@georgfischer.com
www.gfps.com/at

Georg Fischer Fittings GmbH
3160 Traisen
Phone +43 (0) 2762 90300
fittings.ps@georgfischer.com
www.fittings.at

Belgium/Luxembourg

Georg Fischer NV/SA
1070 Bruxelles/Brüssel
Phone +32 (0) 2 556 40 20
be.ps@georgfischer.com
www.gfps.com/be

Brazil

Georg Fischer Sist. de Tub. Ltda.
04795-100 São Paulo
Phone +55 (0) 11 5525 1311
br.ps@georgfischer.com
www.gfps.com/br

Canada

Georg Fischer Piping Systems Ltd
Mississauga, ON L5T 2B2
Phone +1 (905) 670 8005
Fax +1 (905) 670 8513
ca.ps@georgfischer.com
www.gfps.com/ca

China

Georg Fischer Piping Systems Ltd
Shanghai 201319
Phone +86 21 3899 3899
china.ps@georgfischer.com
www.gfps.com/cn

Chinaust Plastics Corp. Ltd.
Songlindian, Zhuozhou city,
Hebei province, China, 072761
Phone +86 312 395 2000
Fax +86 312 365 2222
chinaust@chinaust.com
www.chinaust.com.cn

Denmark/Iceland

Georg Fischer A/S
2630 Taastrup
Phone +45 (0) 70 22 19 75
info.dk.ps@georgfischer.com
www.gfps.com/dk

Finland

Georg Fischer AB
01510 VANTAA
Phone +358 (0) 9 586 58 25
Fax +358 (0) 9 586 58 29
info.fi.ps@georgfischer.com
www.gfps.com/fi

France

Georg Fischer SAS
95932 Roissy Charles de Gaulle Cedex
Phone +33 (0) 1 41 84 68 84
fr.ps@georgfischer.com
www.gfps.com/fr

Germany

Georg Fischer GmbH
73095 Albershausen
Phone +49 (0) 7161 302-0
info.de.ps@georgfischer.com
www.gfps.com/de

India

Georg Fischer Piping Systems Ltd
400 076 Mumbai
Phone +91 224007 2001
branchoffice@georgfischer.com
www.gfps.com/in

Italy

Georg Fischer S.p.A.
20063 Cernusco S/N (MI)
Phone +39 02 921 861
it.ps@georgfischer.com
www.gfps.com/it

Georg Fischer TPA S.r.l.
IT-16012 Busalla (GE)
Phone +39 010 962 47 11
tpa.ps@georgfischer.com
www.gfps.com/it

Japan

Georg Fischer Ltd
556-0011 Osaka,
Phone +81 (0) 6 6635 2691
jp.ps@georgfischer.com
www.gfps.com/jp

Korea

GF Piping Systems
Georg Fischer Korea Co., Ltd.
Unit 2501, U-Tower
120 HeungdeokJungang-ro (Yeongdeok-dong)
Giheung-gu, Yongin-si, Gyeonggi-do, Korea
Phone: +82 31 8017 1450
Fax: +82 31 217 1454
kor.ps@georgfischer.com
www.gfps.com/kr

Malaysia

George Fischer (M) Sdn. Bhd.
40460 Shah Alam, Selangor Darul Ehsan
Phone +60 (0) 3 5122 5585
my.ps@georgfischer.com
www.gfps.com/my

Mexico/Northern Latin America

Georg Fischer S.A. de C.V.
Apodaca, Nuevo Leon
CP66636 Mexico
Phone +52 (81) 1340 8586
Fax +52 (81) 1522 8906
mx.ps@georgfischer.com
www.gfps.com/mx

Middle East

Georg Fischer
Piping Systems (Switzerland) Ltd
Dubai, United Arab Emirates
Phone +971 4 289 49 60
gss.ps@georgfischer.com
www.gfps.com/int

Netherlands

Georg Fischer N.V.
8161 PA Epe
Phone +31 (0) 578 678 222
nl.ps@georgfischer.com
www.gfps.com/nl

Georg Fischer Waga N.V.
NL-8160 AG Epe
Phone +31 (0) 578 678 378
waga.ps@georgfischer.com
www.waga.nl

New Zealand

Georg Fischer Ltd
13 Jupiter Grove, Upper Hutt 5018
PO Box 40399, Upper Hutt 5140
Phone +64 (0) 4 527 9813
nz.ps@georgfischer.com
www.gfps.com/nz

Norway

Georg Fischer AS
1351 Rud
Phone +47 67 18 29 00
no.ps@georgfischer.com
www.gfps.com/no

Poland

Georg Fischer Sp. z o.o.
05-090 Sekocin Nowy
Phone +48 (0) 22 31 31 0 50
poland.ps@georgfischer.com
www.gfps.com/pl

Romania

Georg Fischer
Piping Systems (Switzerland) Ltd
020257 Bucharest - Sector 2
Phone +40 (0) 21 230 53 80
ro.ps@georgfischer.com
www.gfps.com/int

Russia

Georg Fischer
Piping Systems (Switzerland) Ltd
Moscow 125047
Phone +7 495 258 60 80
ru.ps@georgfischer.com
www.gfps.com/ru

Singapore

George Fischer Pte Ltd
11 Tampines Street 92, #04-01/07
528 872 Singapore
Phone +65 6747 0611
sgp.ps@georgfischer.com
www.gfps.com/sg

Spain/Portugal

Georg Fischer S.A.
28046 Madrid
Phone +34 (0) 91 781 98 90
es.ps@georgfischer.com
www.gfps.com/es

Sweden

Georg Fischer AB
117 43 Stockholm
Phone +46 (0) 8 506 775 00
info.se.ps@georgfischer.com
www.gfps.com/se

Switzerland

Georg Fischer
Rohrleitungssysteme (Schweiz) AG
8201 Schaffhausen
Phone +41 (0) 52 631 30 26
ch.ps@georgfischer.com
www.gfps.com/ch

Taiwan

Georg Fischer Co., Ltd
San Chung Dist., New Taipei City
Phone +886 2 8512 2822
Fax +886 2 8512 2823
www.gfps.com/tw

United Kingdom/Ireland

Georg Fischer Sales Limited
Coventry, CV2 2ST
Phone +44 (0) 2476 535 535
uk.ps@georgfischer.com
www.gfps.com/uk

USA/Caribbean

Georg Fischer LLC
9271 Jeronimo Road
92618 Irvine, CA
Phone +1 714 731 88 00
Fax +1 714 731 62 01
us.ps@georgfischer.com
www.gfps.com/us

Georg Fischer Central Plastics LLC
Shawnee, OK 74801
Phone +1 (405) 273 63 02
gfccentral.ps@georgfischer.com
www.centralplastics.com

Vietnam

George Fischer Pte Ltd
136E Tran Vu, Ba Dinh District, Hanoi
Phone +84 4 3715 3290
Fax +84 4 3715 3285

International

Georg Fischer
Piping Systems (Switzerland) Ltd
8201 Schaffhausen/Switzerland
Phone +41 (0) 52 631 30 03
Fax +41 (0) 52 631 28 93
info.export@georgfischer.com
www.gfps.com/int

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.



700.671.452

GFDO_6202_4b (07.14)

© Georg Fischer Piping Systems Ltd
CH-8201 Schaffhausen/Switzerland, 2014
Printed in Switzerland